




### 3D DRAWING

H149 - 15R

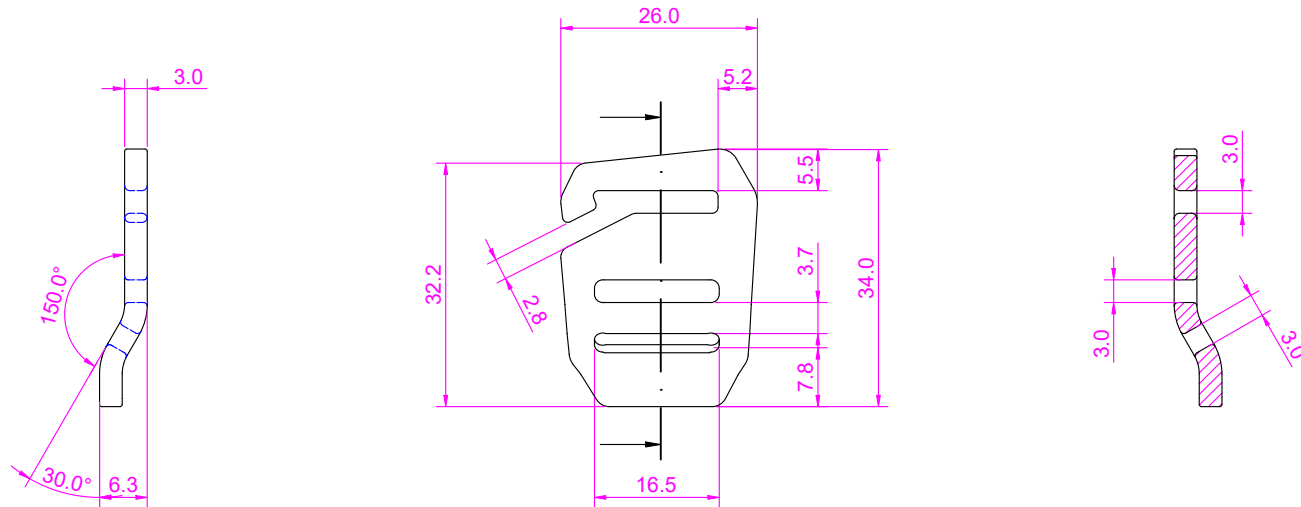

H149 - 15L



### NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

### GENERAL TOLERANCES (mm)

|         |   |    |          |
|---------|---|----|----------|
| 0       | ~ | 10 | +/- 0.20 |
| 11      | ~ | 25 | +/- 0.25 |
| 26      | ~ | 38 | +/- 0.30 |
| 39      | ~ | 50 | +/- 0.40 |
| OVER 50 |   |    | +/- 0.50 |


### INFORMATION

|             |                       |
|-------------|-----------------------|
| ITEM NO.    | H149 - 15             |
| DESCRIPTION | NURI A DUAL HOOK      |
| MATERIAL    | ALU6061 - T6, T = 3MM |
| WEIGHT      | 5.00g                 |
| DATE        | 23/APR/2025           |

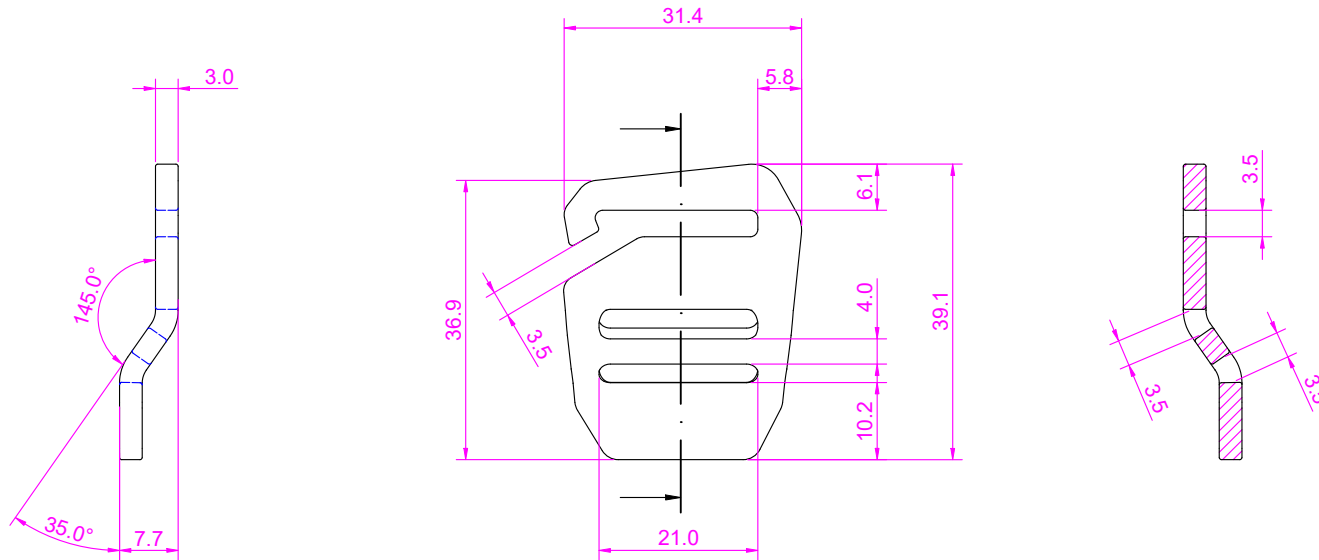


### 3D DRAWING

H149 - 20R



H149 - 20L



### NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

### GENERAL TOLERANCES (mm)

|         |   |    |          |
|---------|---|----|----------|
| 0       | ~ | 10 | +/- 0.20 |
| 11      | ~ | 25 | +/- 0.25 |
| 26      | ~ | 38 | +/- 0.30 |
| 39      | ~ | 50 | +/- 0.40 |
| OVER 50 |   |    | +/- 0.50 |

### INFORMATION


|             |                       |
|-------------|-----------------------|
| ITEM NO.    | H149 - 20             |
| DESCRIPTION | NURI A DUAL HOOK      |
| MATERIAL    | ALU6061 - T6, T = 3MM |
| WEIGHT      | 6.60g                 |
| DATE        | 29/MAY/2024           |

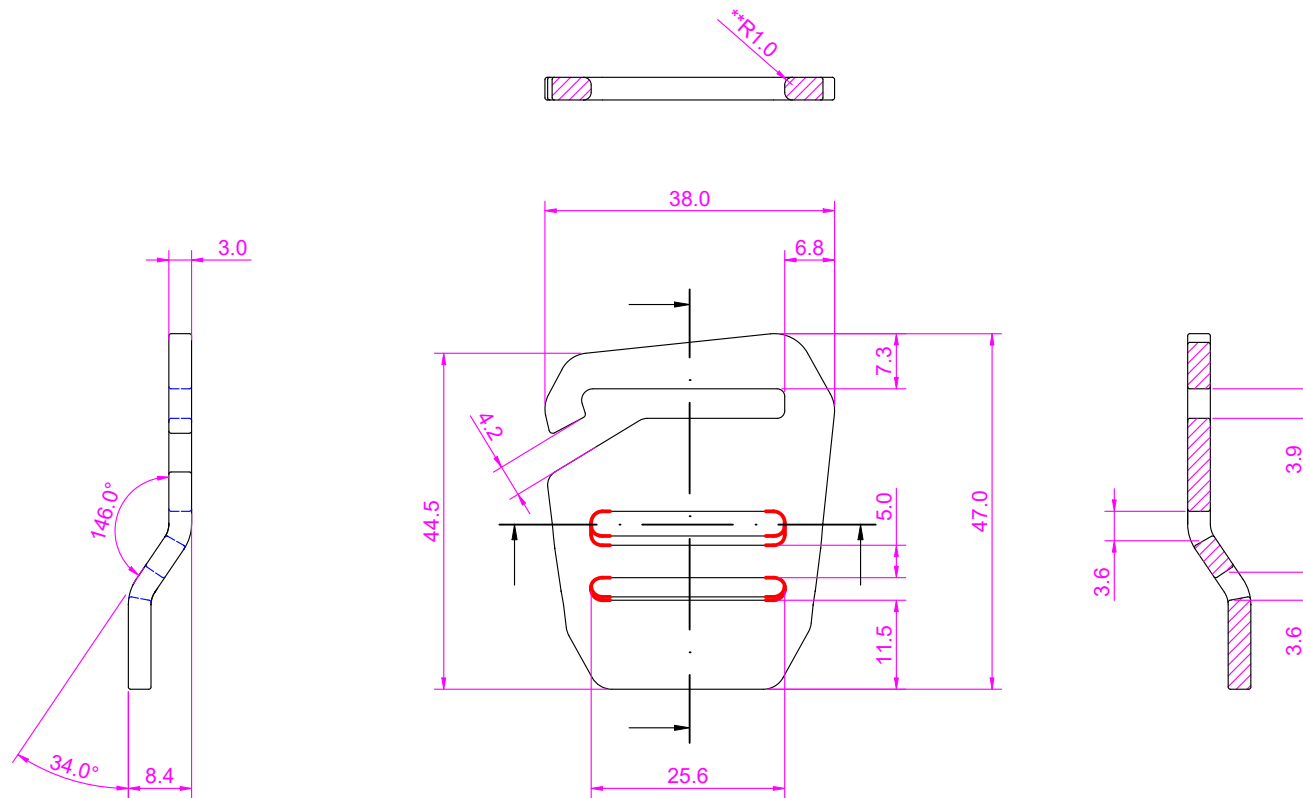


 **FILLET TREATMENT  
TO AVOID SHARP EDGES**

### 3D DRAWING

H149 - 25R



H149 - 25L



### NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.
6. RED LINE WILL BE APPLIED FILLET TREATMENT.

### GENERAL TOLERANCES (mm)

|         |      |          |
|---------|------|----------|
| 0       | ~ 10 | +/- 0.20 |
| 11      | ~ 25 | +/- 0.25 |
| 26      | ~ 38 | +/- 0.30 |
| 39      | ~ 50 | +/- 0.40 |
| OVER 50 |      | +/- 0.50 |

### INFORMATION

|             |                       |
|-------------|-----------------------|
| ITEM NO.    | H149 - 25             |
| DESCRIPTION | NURI A DUAL HOOK      |
| MATERIAL    | ALU6061 - T6, T = 3MM |
| WEIGHT      | 9.60g                 |
| DATE        | 29/MAY/2025           |