
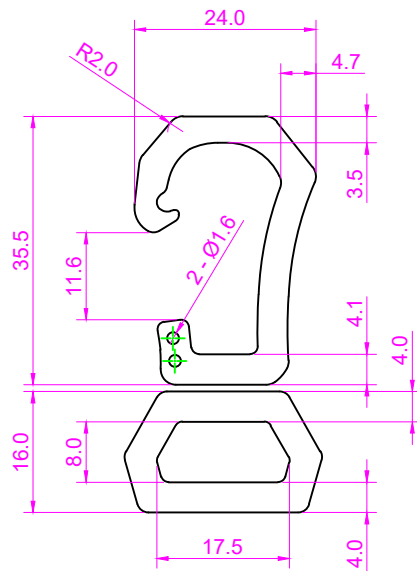


ASSEMBLY VIEW

SPRING

3D DRAWING



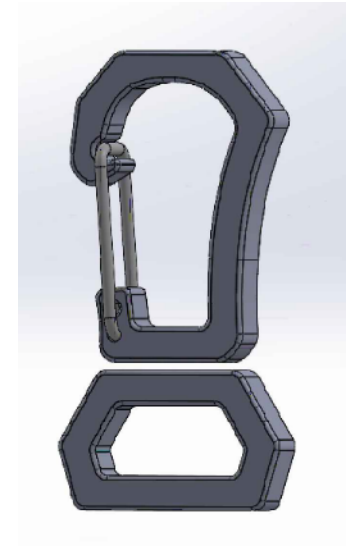


NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

INFORMATION

ITEM NO.	H120 - 15
DESCRIPTION	IGLOO SWIVEL HOOK
MATERIAL	ALU6005 - T5, T = 7.4MM
WEIGHT	11.30g
DATE	8/MAY/2024

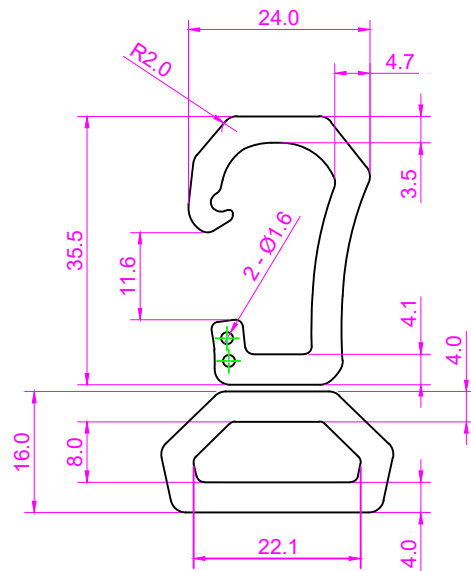


ASSEMBLY VIEW



SPRING

3D DRAWING



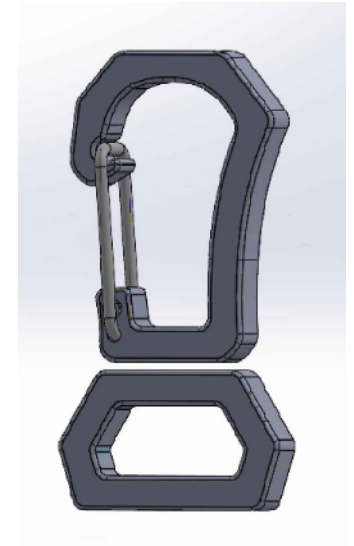


NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

INFORMATION

ITEM NO.	H120 - 20
DESCRIPTION	IGLOO SWIVEL HOOK
MATERIAL	ALU6005 - T5, T = 7.4MM
WEIGHT	12.30g
DATE	8/MAY/2024

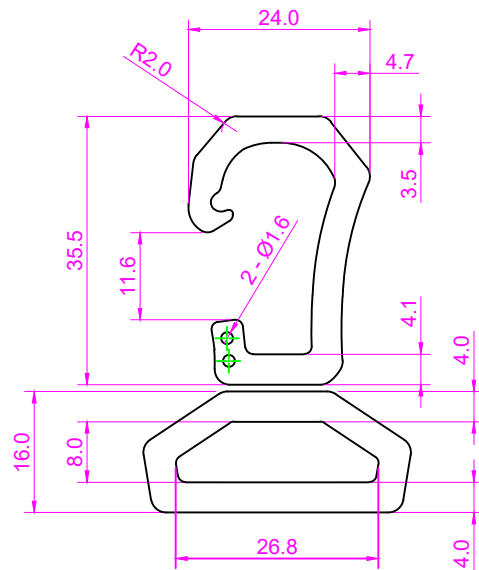

ASSEMBLY VIEW



SPRING

3D DRAWING






NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

INFORMATION

ITEM NO.	H120 - 25
DESCRIPTION	IGLOO SWIVEL HOOK
MATERIAL	ALU6005 - T5, T = 7.4MM
WEIGHT	13.00g
DATE	8/MAY/2024

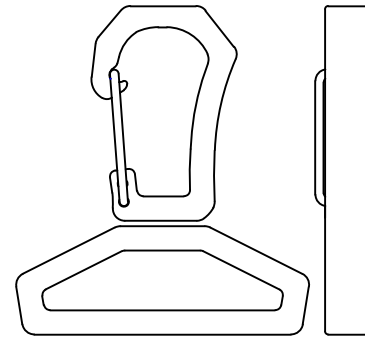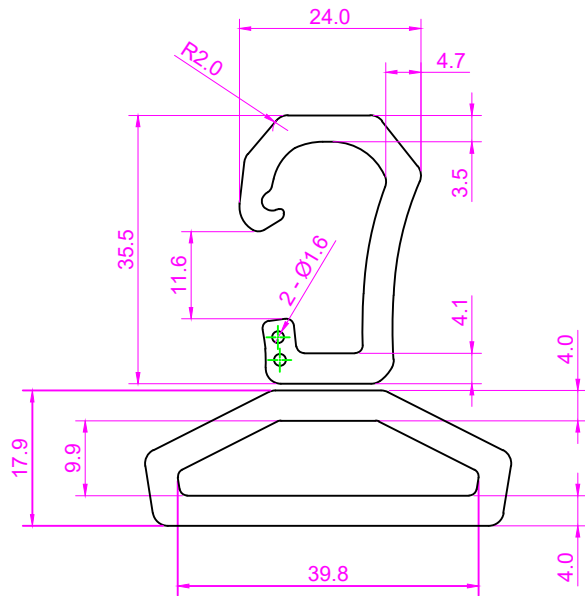


ASSEMBLY VIEW



SPRING

3D DRAWING

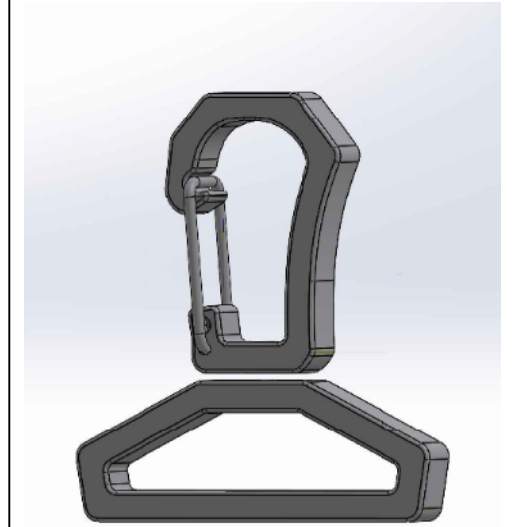

NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

INFORMATION

ITEM NO.	H120 - 38
DESCRIPTION	IGLOO SWIVEL HOOK
MATERIAL	ALU6005 - T5, T = 7.4MM
WEIGHT	15.50g
DATE	8/MAY/2024