
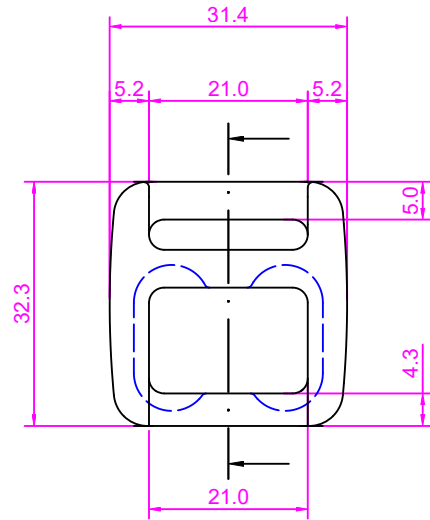



BAR

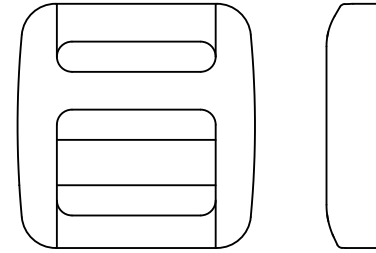

ASSEMBLY VIEW

SCALE 1:1

3D DRAWING

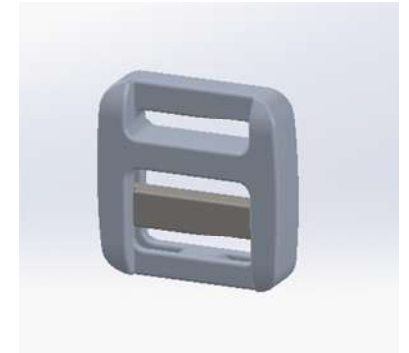

NOTES




1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50


INFORMATION

ITEM NO.	K146 - 20
DESCRIPTION	ADJUSTABLE TRIGLIDE
MATERIAL	ALU6061 - T6, T = 8MM
WEIGHT	14.80g
DATE	01/JAN/2025

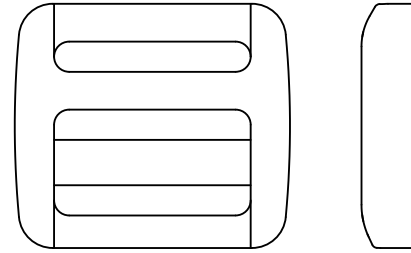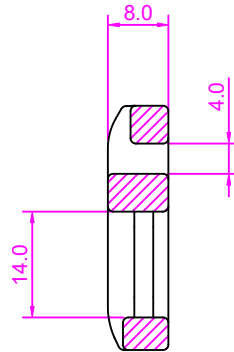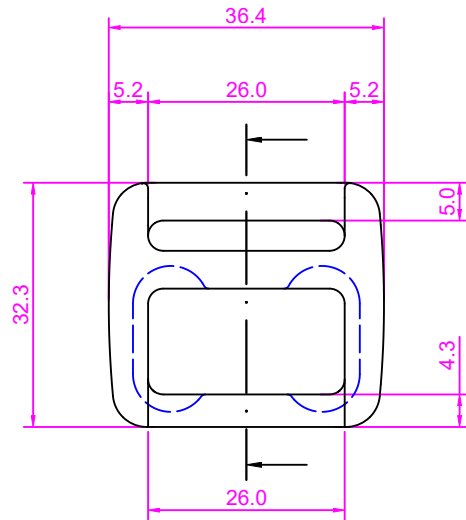


ASSEMBLY VIEW

SCALE 1:1

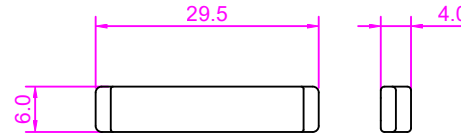

BAR

3D DRAWING

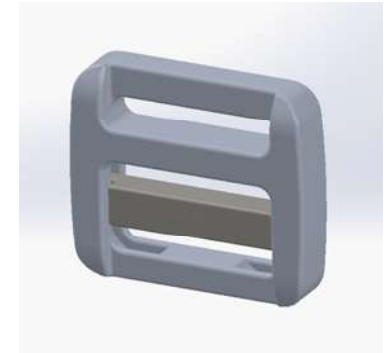

NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50




INFORMATION

ITEM NO.	K146 - 25
DESCRIPTION	ADJUSTABLE TRIGLIDE
MATERIAL	ALU6061 - T6, T = 8MM
WEIGHT	18.00g
DATE	01/JAN/2025

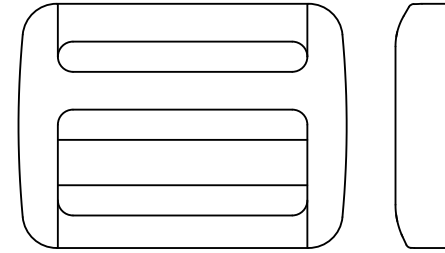


ASSEMBLY VIEW

SCALE 1:1

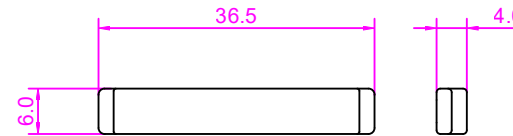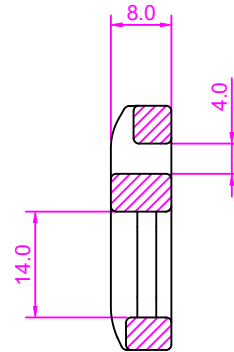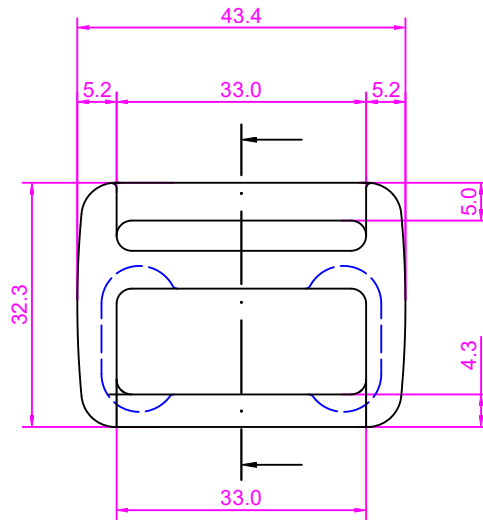

BAR

3D DRAWING

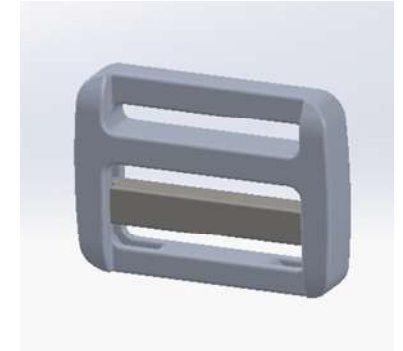

NOTES




1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50


INFORMATION

ITEM NO.	K146 - 32
DESCRIPTION	ADJUSTABLE TRIGLIDE
MATERIAL	ALU6061 - T6, T = 8MM
WEIGHT	21.50g
DATE	01/JAN/2025

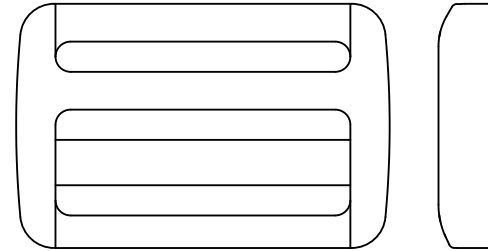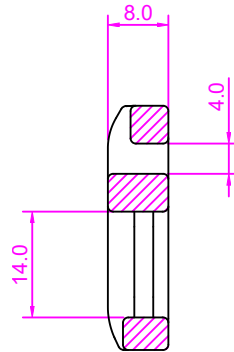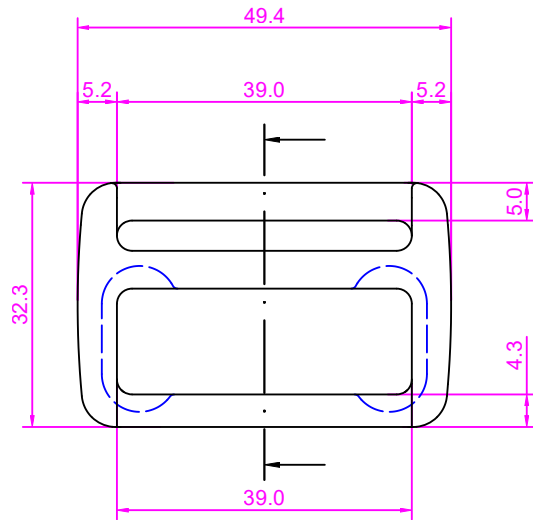


ASSEMBLY VIEW

SCALE 1:1

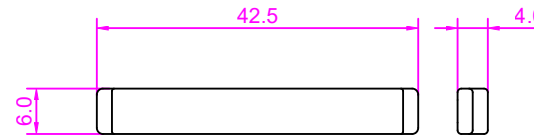

BAR

3D DRAWING

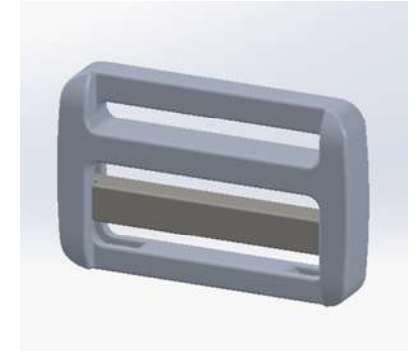

NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50

INFORMATION

ITEM NO.	K146 - 38
DESCRIPTION	ADJUSTABLE TRIGLIDE
MATERIAL	ALU6061 - T6, T = 8MM
WEIGHT	24.40g
DATE	01/JAN/2025