




 **FILLET TREATMENT
TO AVOID SHARP EDGES**

3D DRAWING

H101 - 10R

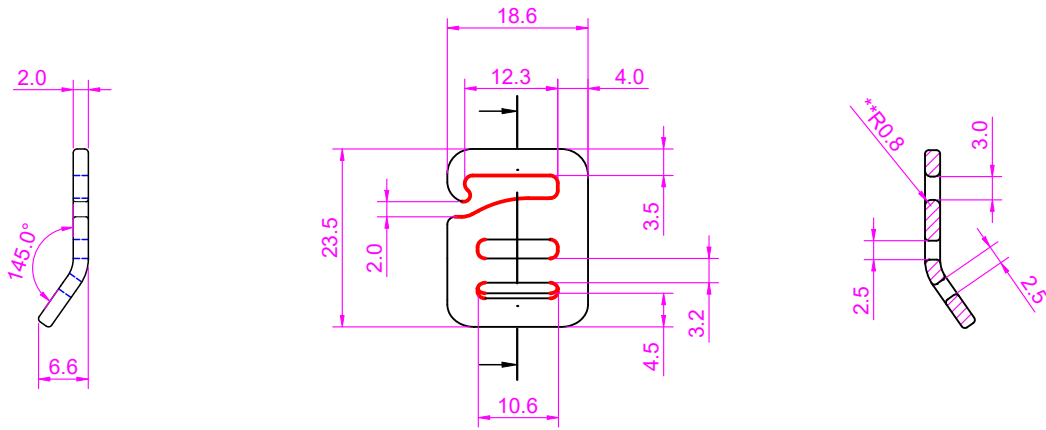

H101 - 10L



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.
6. RED LINE WILL BE APPLIED FILLET TREATMENT.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50

INFORMATION

ITEM NO.	H101 - 10
DESCRIPTION	VOYAGER DUAL HOOK
MATERIAL	ALU6061 - T6, T = 2.0MM
WEIGHT	1.80g
DATE	19/APR/2024

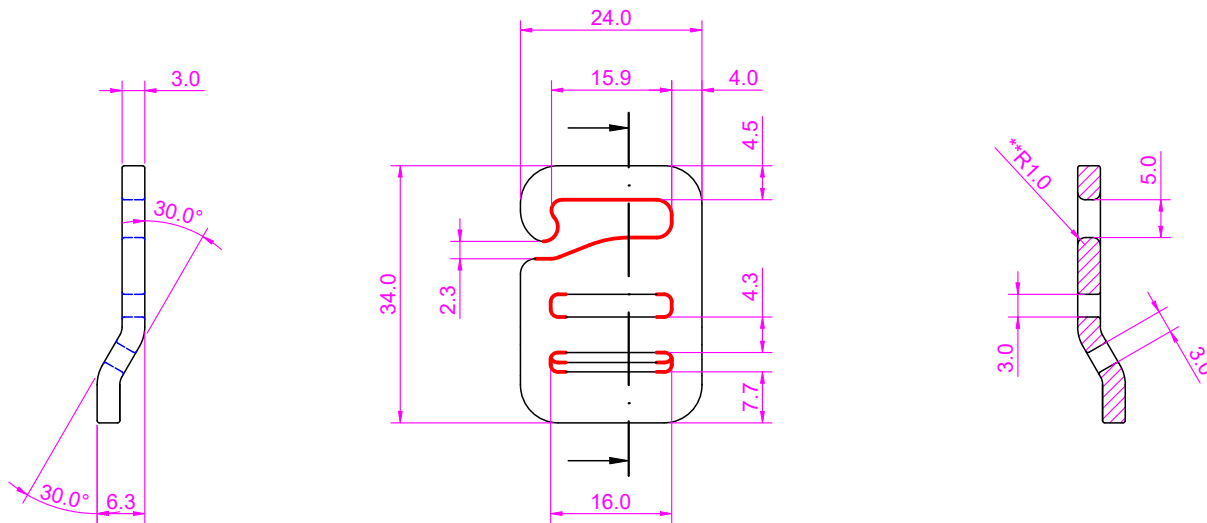

 **FILLET TREATMENT
TO AVOID SHARP EDGES**

3D DRAWING

H101 - 15R



H101 - 15L



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.
6. RED LINE WILL BE APPLIED FILLET TREATMENT.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50

INFORMATION

ITEM NO.	H101 - 15
DESCRIPTION	VOYAGER DUAL HOOK
MATERIAL	ALU6061 - T6, T = 3.0MM
WEIGHT	4.80g
DATE	19/APR/2024

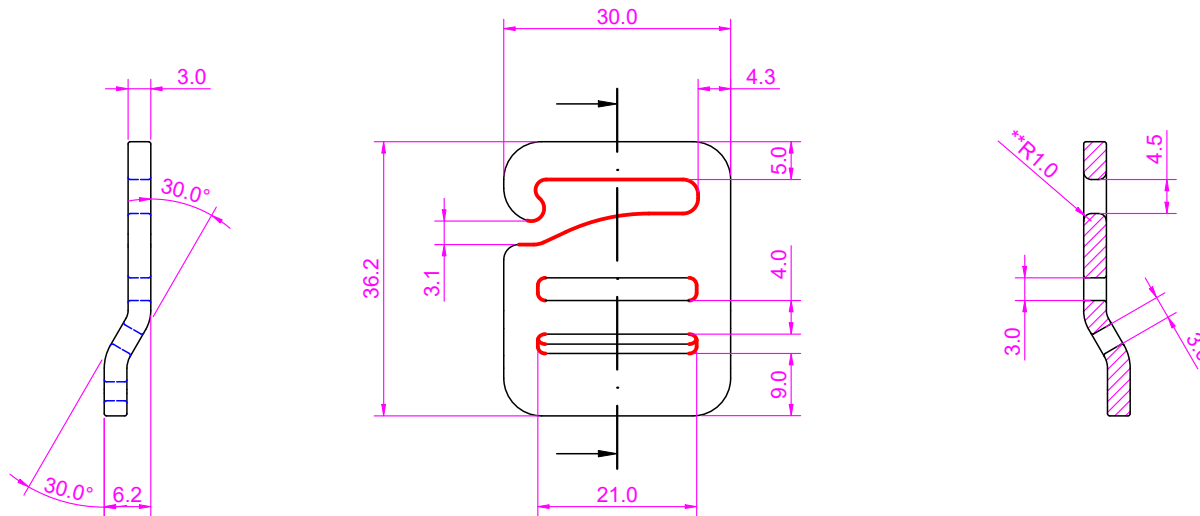

 **FILLET TREATMENT
TO AVOID SHARP EDGES**

3D DRAWING

H101 - 20R



H101 - 20L



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.
6. RED LINE WILL BE APPLIED FILLET TREATMENT.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50

INFORMATION

ITEM NO.	H101 - 20
DESCRIPTION	VOYAGER DUAL HOOK
MATERIAL	ALU6061 - T6, T = 3.0MM
WEIGHT	6.50g
DATE	11/SEP/2026

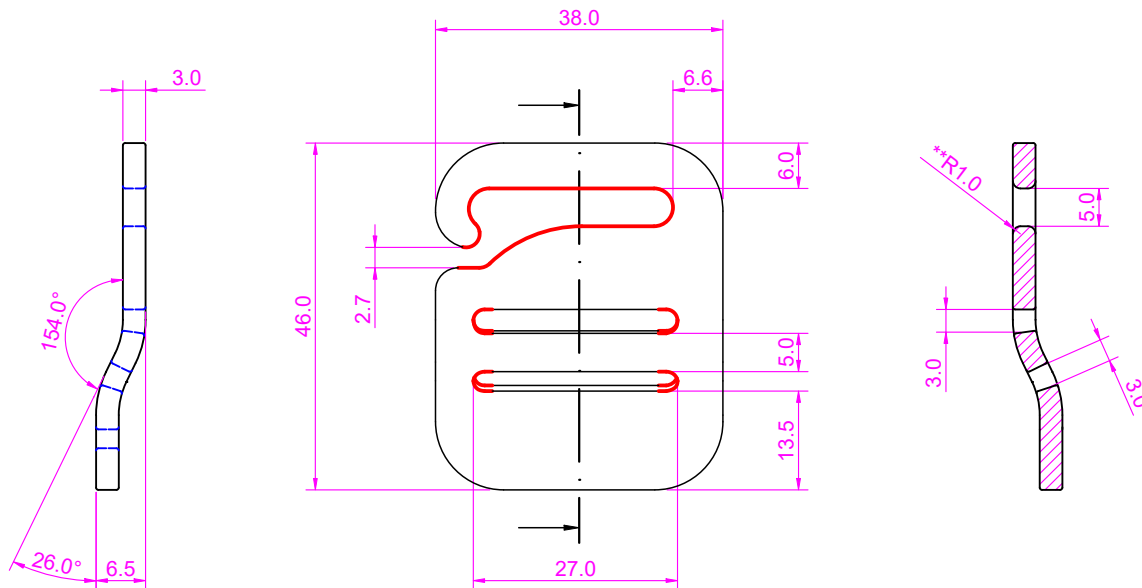

 **FILLET TREATMENT
TO AVOID SHARP EDGES**

3D DRAWING

H101 - 25R



H101 - 25L



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.
6. RED LINE WILL BE APPLIED FILLET TREATMENT.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50

INFORMATION

ITEM NO.	H101 - 25
DESCRIPTION	VOYAGER DUAL HOOK
MATERIAL	ALU6061 - T6, T = 3.0MM
WEIGHT	10.80g
DATE	11/SEP/2026

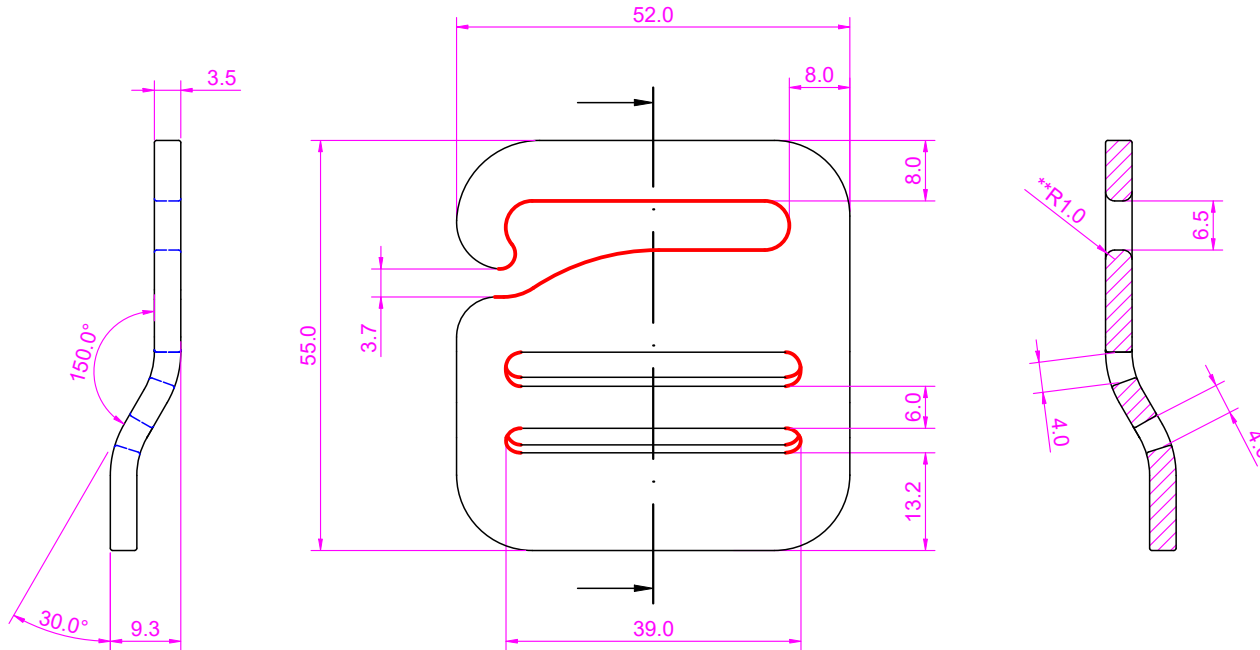

3D DRAWING

H101 - 38R



H101 - 38L



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.
6. RED LINE WILL BE APPLIED FILLET TREATMENT.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50

INFORMATION

ITEM NO.	H101 - 38
DESCRIPTION	VOYAGER DUAL HOOK
MATERIAL	ALU6061 - T6, T = 3.5MM
WEIGHT	19.10g
DATE	19/APR/2024

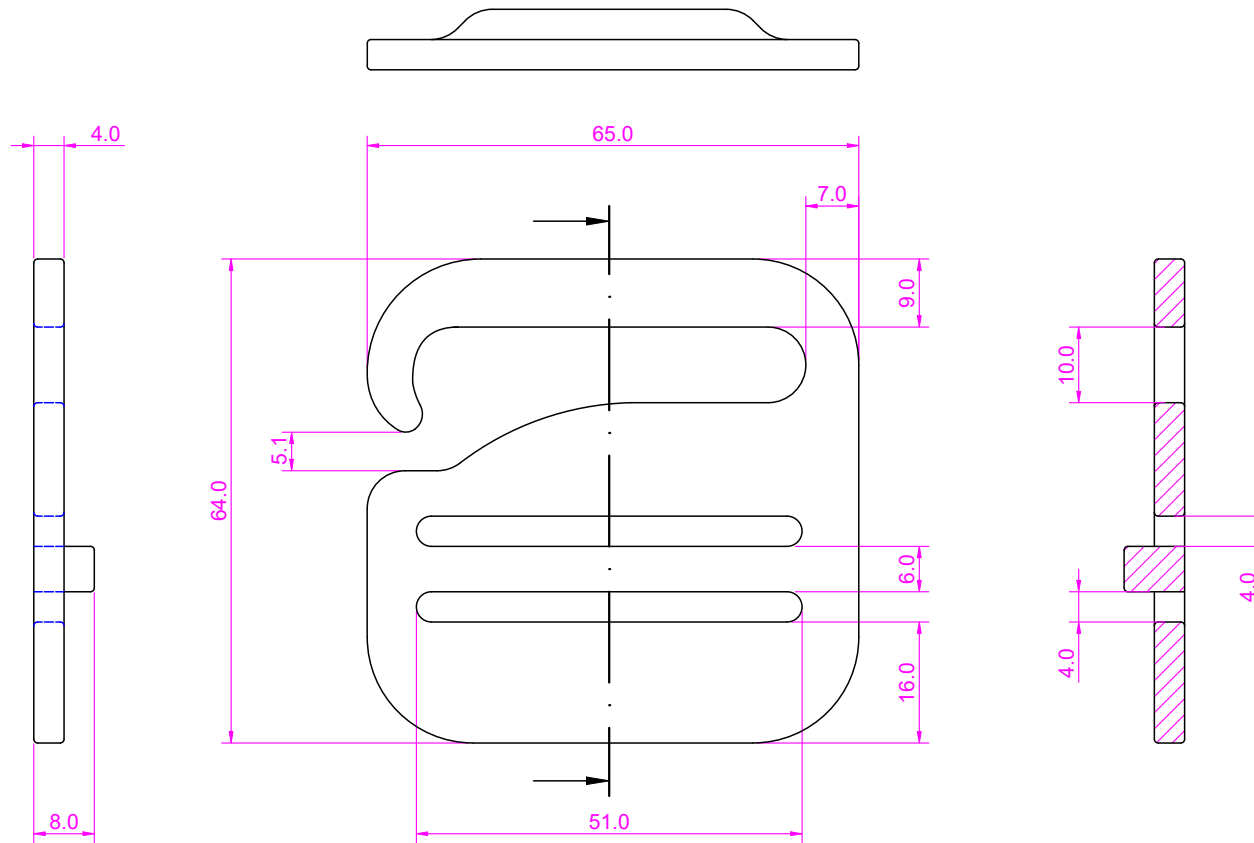

3D DRAWING

H101 - 50R



H101 - 50L



NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50

INFORMATION

ITEM NO.	H101 - 50
DESCRIPTION	VOYAGER DUAL HOOK
MATERIAL	ALU6061 - T6, T = 4.0MM
WEIGHT	30.00g
DATE	19/APR/2024