

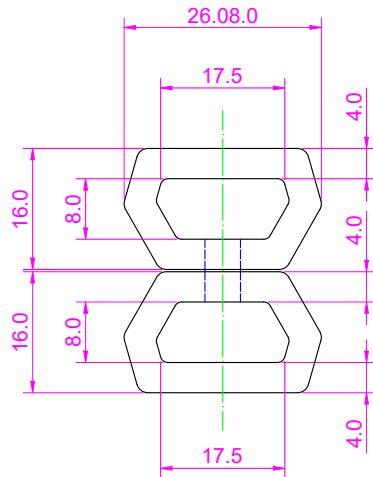


PIN




C-RING



ASSEMBLY VIEW

SCALE 1:1

3D DRAWING



NOTES




1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)


0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION


ITEM NO.	K118 - 15
DESCRIPTION	IGLOO SWIVEL D-RING
MATERIAL	ALU6005 - T5, T = 7.5MM
WEIGHT	9.00g
DATE	08/MAY/2024

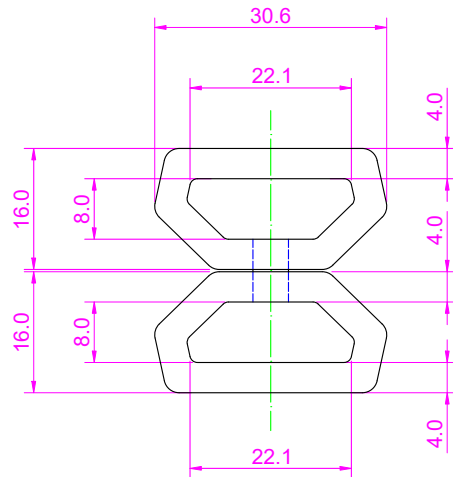

PIN




C-RING



ASSEMBLY VIEW

SCALE 1:1

3D DRAWING



NOTES




1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)


0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION

ITEM NO.	K118 - 20
DESCRIPTION	IGLOO SWIVEL D-RING
MATERIAL	ALU6005 - T5, T = 7.5MM
WEIGHT	10.60g
DATE	08/MAY/2024

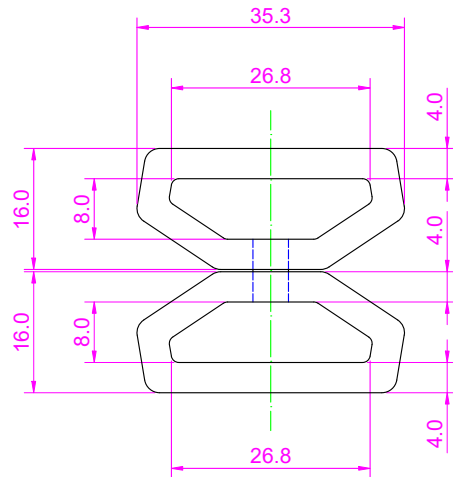


PIN

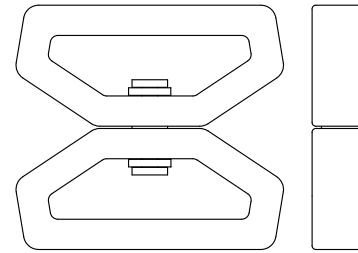


ASSEMBLY VIEW

SCALE 1:1



C-RING

3D DRAWING



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50



INFORMATION

ITEM NO.	K118 - 25
DESCRIPTION	IGLOO SWIVEL D-RING
MATERIAL	ALU6005 - T5, T = 7.5MM
WEIGHT	12.00g
DATE	08/MAY/2024

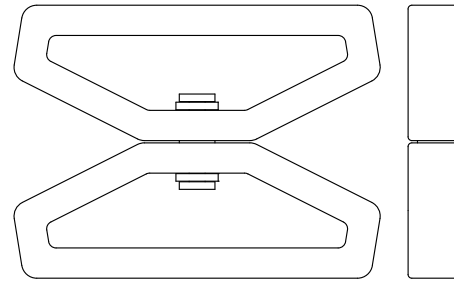


ASSEMBLY VIEW

SCALE 1:1

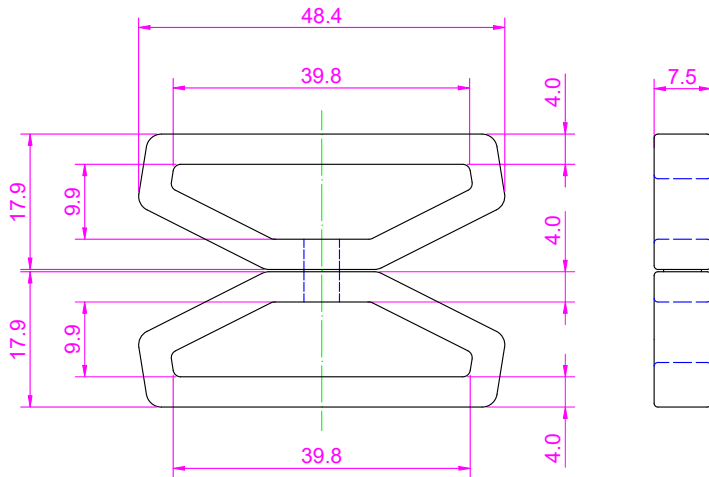


PIN



C-RING

3D DRAWING

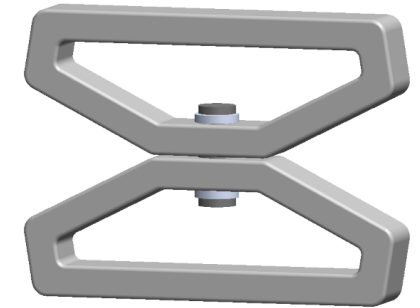

NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION

ITEM NO.	K118 - 38
DESCRIPTION	IGLOO SWIVEL D-RING
MATERIAL	ALU6005 - T5, T = 7.5MM
WEIGHT	16.30g
DATE	08/MAY/2024