



**ASSEMBLY VIEW**

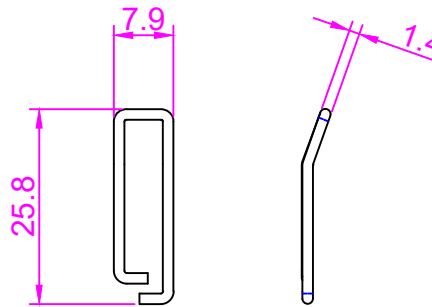

**SPRING**

**3D DRAWING**




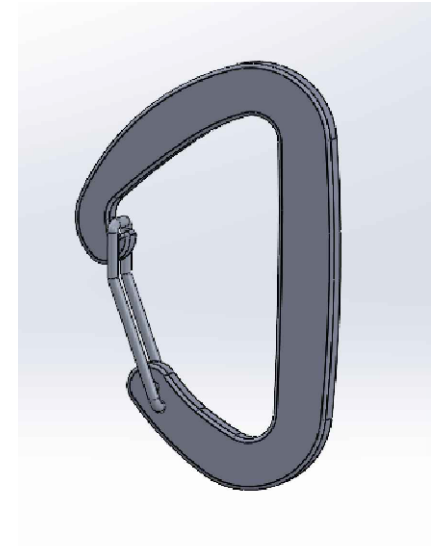


**NOTES**

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

**INFORMATION**


ITEM NO.	H129R
DESCRIPTION	RANGER CARABINER
MATERIAL	ALU6063 - T5, T = 4MM
DATE	13/MAY/2024

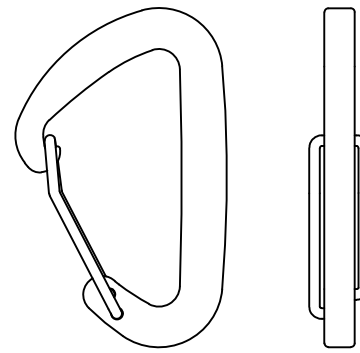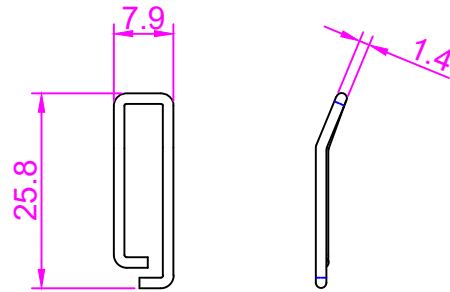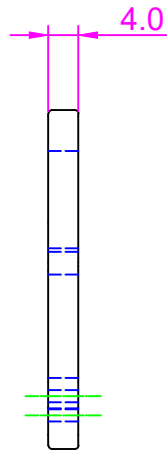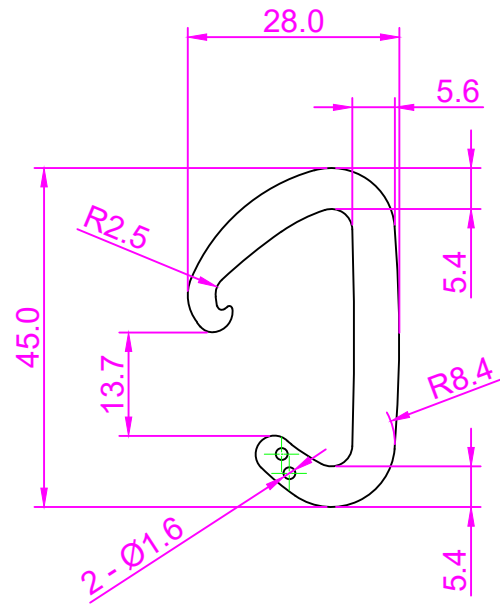

ASSEMBLY VIEW

SPRING

### 3D DRAWING

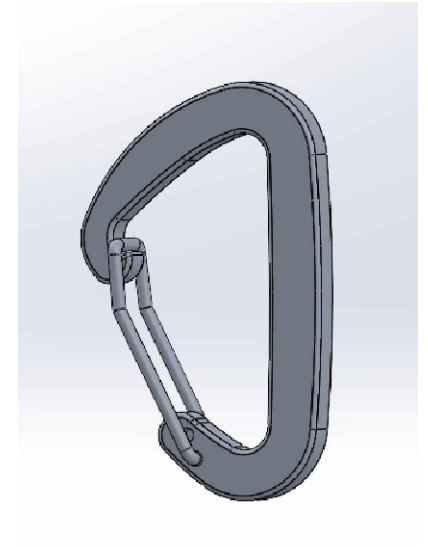

### NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

### INFORMATION

ITEM NO.	H129S
DESCRIPTION	RANGER CARABINER
MATERIAL	ALU6063 - T5, T = 4MM
DATE	13/MAY/2024