

NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.


GENERAL TOLERANCES (mm)

0 ~ 10	+/-0.20
11 ~ 25	+/-0.25
26 ~ 38	+/-0.30
39 ~ 50	+/-0.40
OVER 50	+/-0.50


INFORMATION

CUSTOMER	WETOOL	ITEM NO.	K154 - 20
DATE	22/OCT/2024	DESCRIPTION	UNIVERSAL SLIT LOOP
WEIGHT	1.20g	MATERIAL	ALU6061 - T6, T = 2MM
SCALE	1:1	FINISH	SANDBLASTING + ANODIZING

REV.NO.	ENGINEER	DATE
R. 1	TINA LE	22/OCT/2024
R. 2		
R. 3		
R. 4		

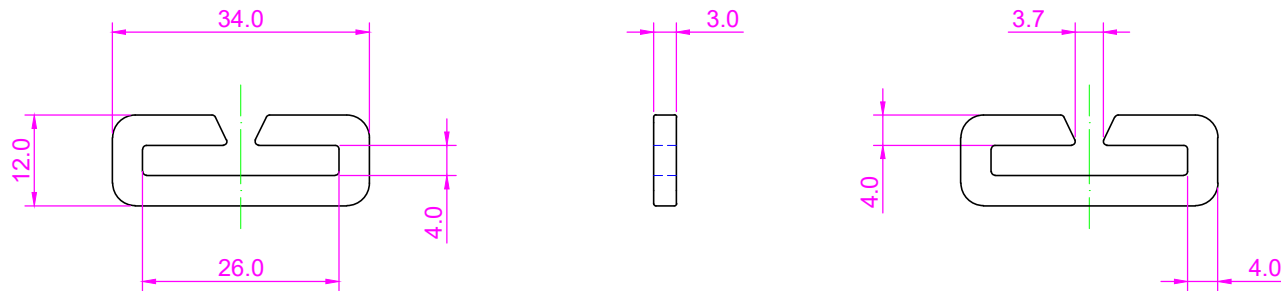

3D DRAWING

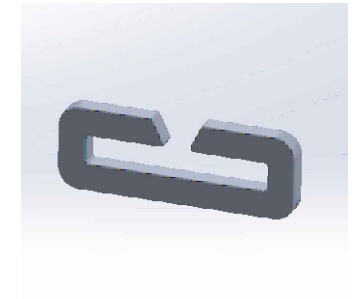

NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)


0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
	OVER 50	+/- 0.50

INFORMATION

ITEM NO.	K154 - 25
DESCRIPTION	UNIVERSAL SLIT LOOP
MATERIAL	ALU6061 - T6, T = 3MM
WEIGHT	2.00g
DATE	22/OCT/2024

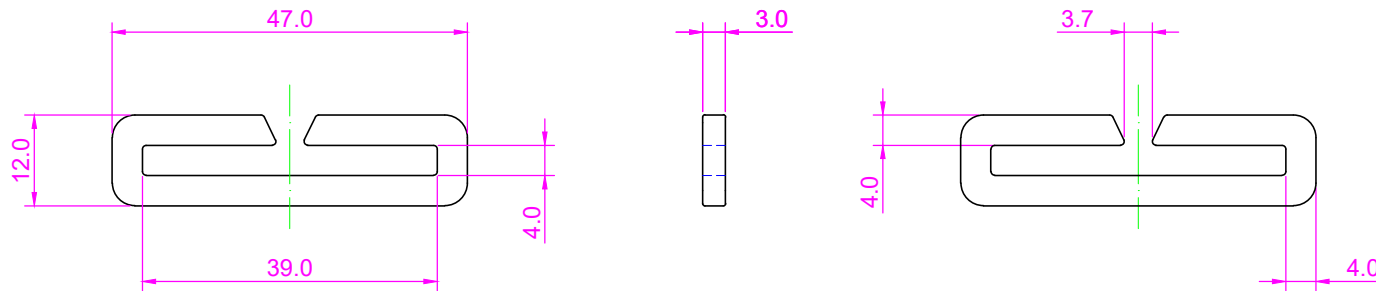

3D DRAWING

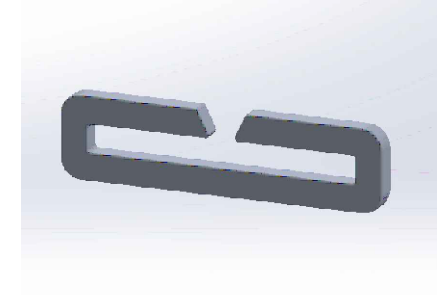

NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)


0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
	OVER 50	+/- 0.50

INFORMATION

ITEM NO.	K154 - 38
DESCRIPTION	UNIVERSAL SLIT LOOP
MATERIAL	ALU6061 - T6, T = 3MM
WEIGHT	3.00g
DATE	26/NOV/2024

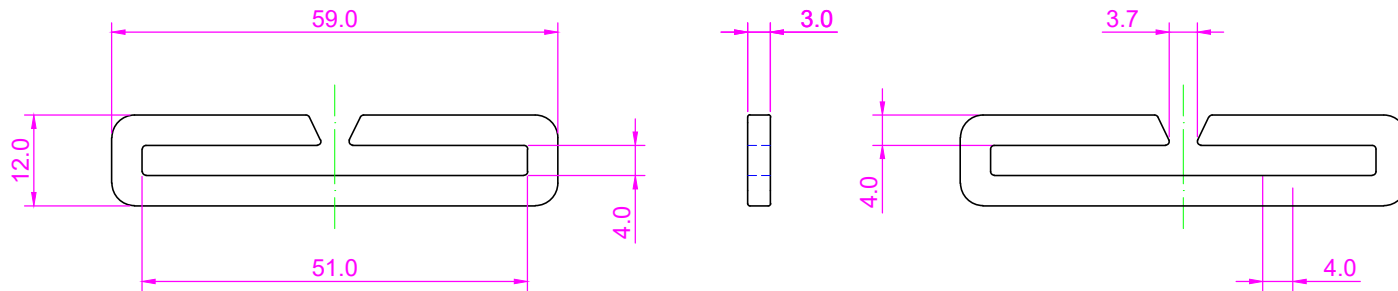

3D DRAWING

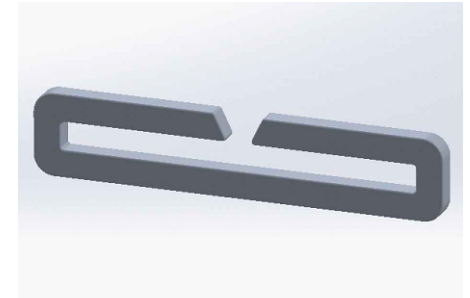

NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
	OVER 50	+/- 0.50

INFORMATION

ITEM NO.	K154 - 50
DESCRIPTION	UNIVERSAL SLIT LOOP
MATERIAL	ALU6061 - T6, T = 3MM
WEIGHT	3.80g
DATE	26/NOV/2024