


ASSEMBLY VIEW

SCALE 1:1



SPRING

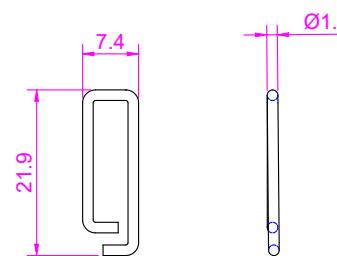

3D DRAWING

**NOTES**




1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

**GENERAL TOLERANCES (mm)**

0 ~ 10	+/-.20
11 ~ 25	+/-.25
26 ~ 38	+/-.30
39 ~ 50	+/-.40
OVER 50	+/-.50


**INFORMATION**

ITEM NO.	H152 - 20
DESCRIPTION	GRIP GATE DUAL HOOK
MATERIAL	ALU6061 - T6, T = 3MM
WEIGHT	5.30g
DATE	17/DEC/2025

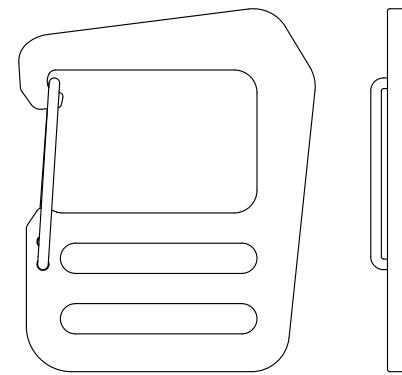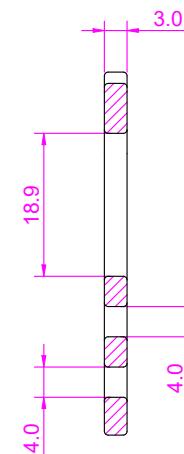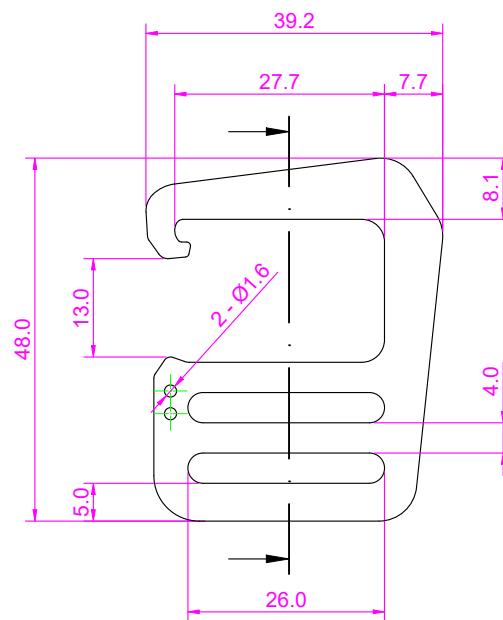

ASSEMBLY VIEW

SCALE 1:1

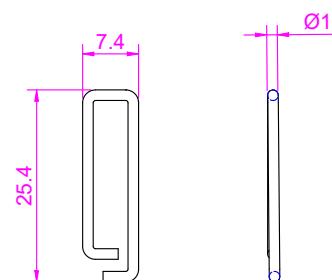

SPRING

**3D DRAWING**



**NOTES**




1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

**GENERAL TOLERANCES (mm)**

0 ~ 10	+/-.20
11 ~ 25	+/-.25
26 ~ 38	+/-.30
39 ~ 50	+/-.40
OVER 50	+/-.50


**INFORMATION**

ITEM NO.	H152 - 25
DESCRIPTION	GRIP GATE DUAL HOOK
MATERIAL	ALU6061 - T6, T = 3MM
WEIGHT	7.30g
DATE	17/DEC/2025

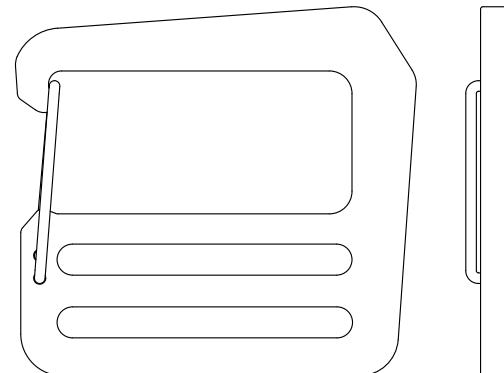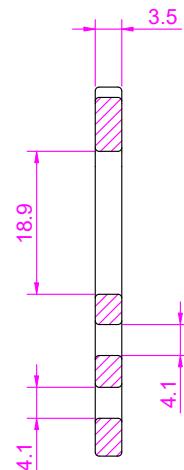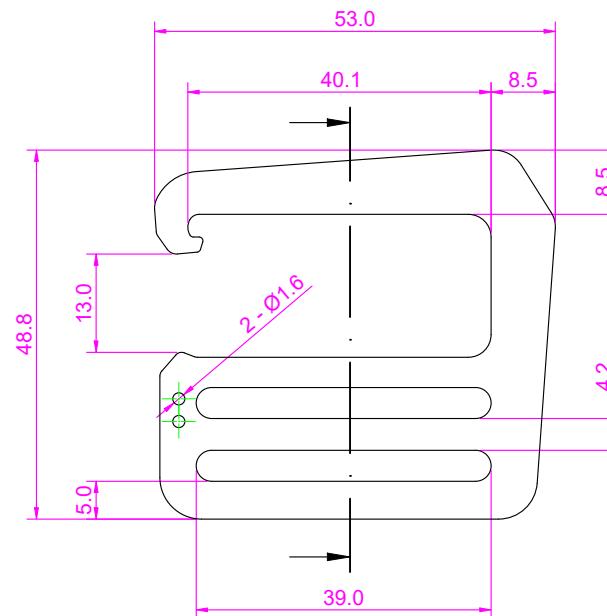

ASSEMBLY VIEW

SCALE 1:1

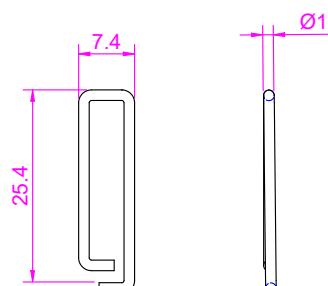

SPRING

**3D DRAWING**



**NOTES**

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

**GENERAL TOLERANCES (mm)**

0 ~ 10	+/-.20
11 ~ 25	+/-.25
26 ~ 38	+/-.30
39 ~ 50	+/-.40
OVER 50	+/-.50

**INFORMATION**

ITEM NO.	H152 - 38
DESCRIPTION	GRIP GATE DUAL HOOK
MATERIAL	ALU6061 - T6, T = 3.5MM
WEIGHT	12.00g
DATE	17/DEC/2025