



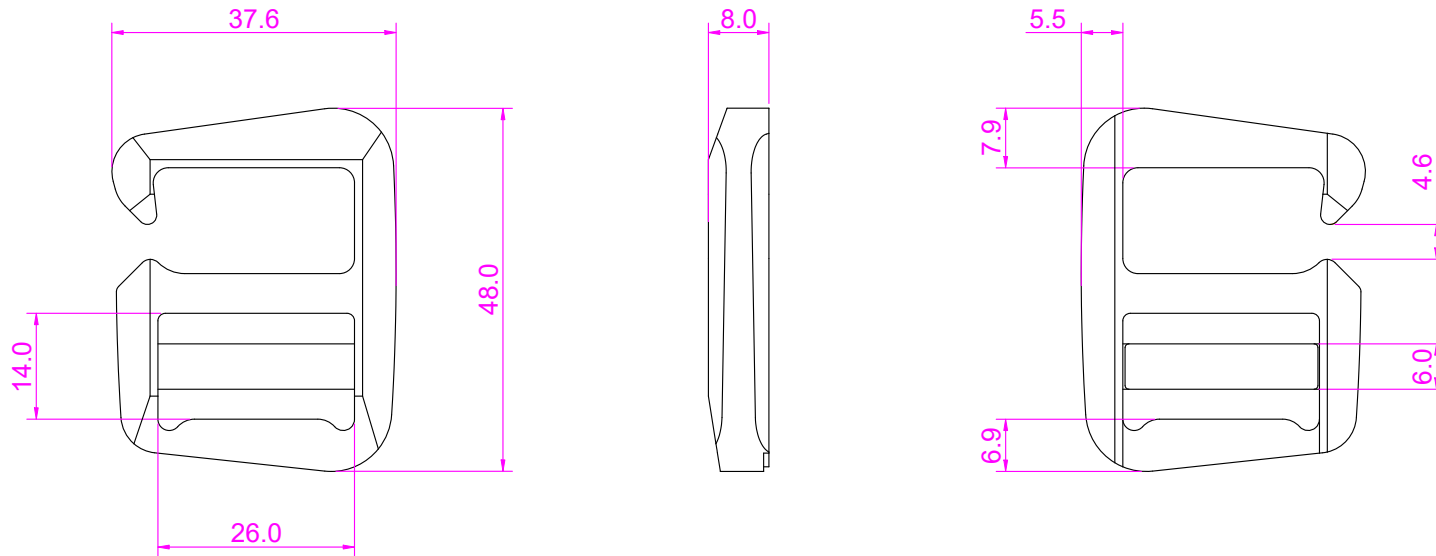


3D DRAWING

FRONT SIDE



BACK SIDE



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50


INFORMATION

ITEM NO.	B106 - 25
DESCRIPTION	ATLAS BELT
MATERIAL	ALU6061 - T6, T = 8MM
WEIGHT	17.00g
DATE	02/AUG/2024

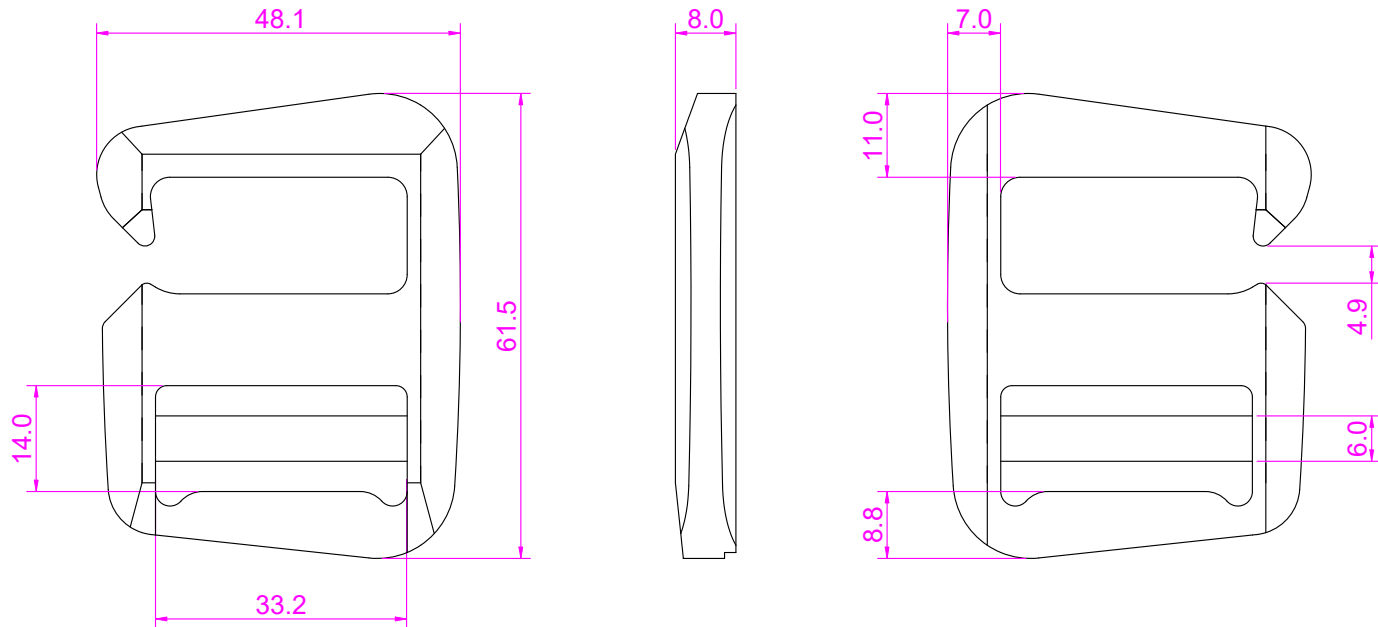


3D DRAWING

FRONT SIDE



BACK SIDE



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50


INFORMATION

ITEM NO.	B106 - 32
DESCRIPTION	ATLAS BELT
MATERIAL	ALU6061 - T6, T = 8MM
WEIGHT	31.00g
DATE	02/AUG/2024

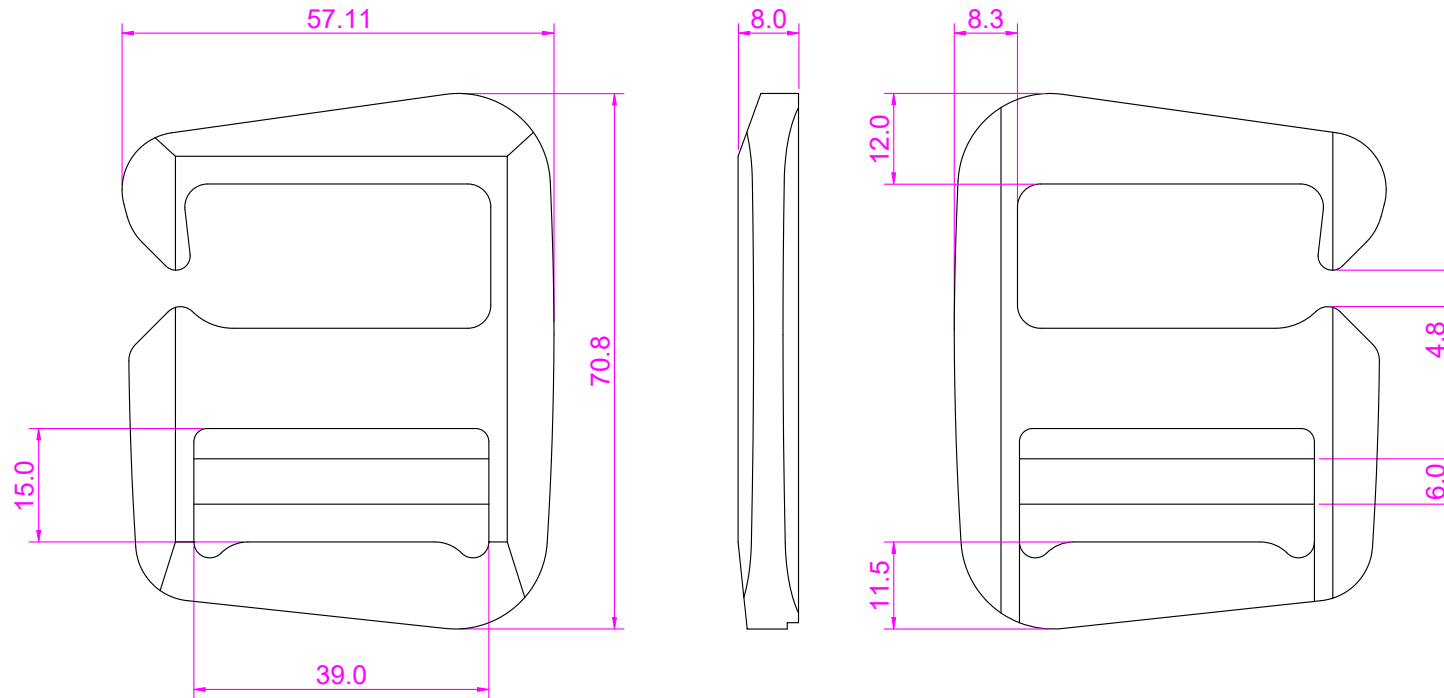


3D DRAWING

FRONT SIDE



BACK SIDE



NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION

ITEM NO.	B106 - 38
DESCRIPTION	ATLAS BELT
MATERIAL	ALU6061 - T6, T = 8MM
WEIGHT	43.50g
DATE	02/AUG/2024