
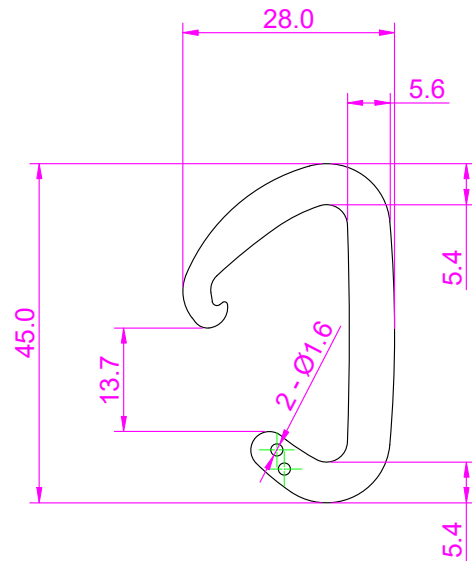


SPRING

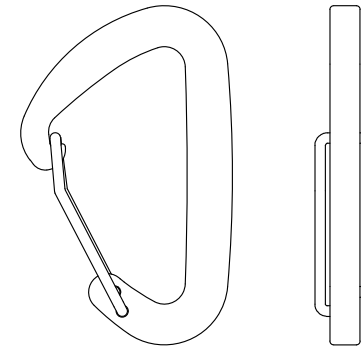

ASSEMBLY VIEW

SCALE 1:1

3D DRAWING



NOTES




1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50


INFORMATION

ITEM NO.	H129S
DESCRIPTION	RANGER CARABINER
MATERIAL	ALU6061 - T6, T = 4MM
WEIGHT	9.80g
DATE	13/MAY/2024

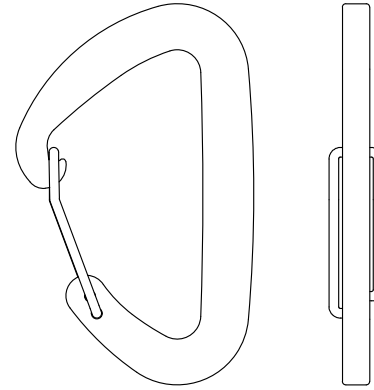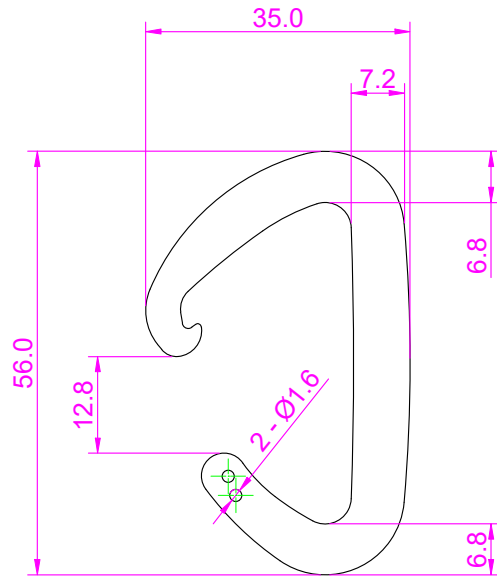

ASSEMBLY VIEW

SCALE 1:1

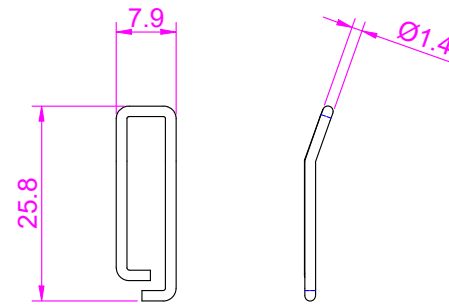

SPRING

3D DRAWING



NOTES





1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION

ITEM NO.	H129R
DESCRIPTION	RANGER CARABINER
MATERIAL	ALU6061 - T6, T = 4MM
WEIGHT	8.60g
DATE	13/MAY/2024

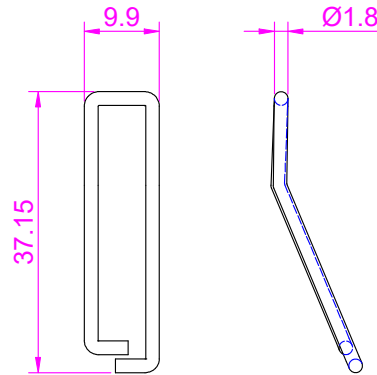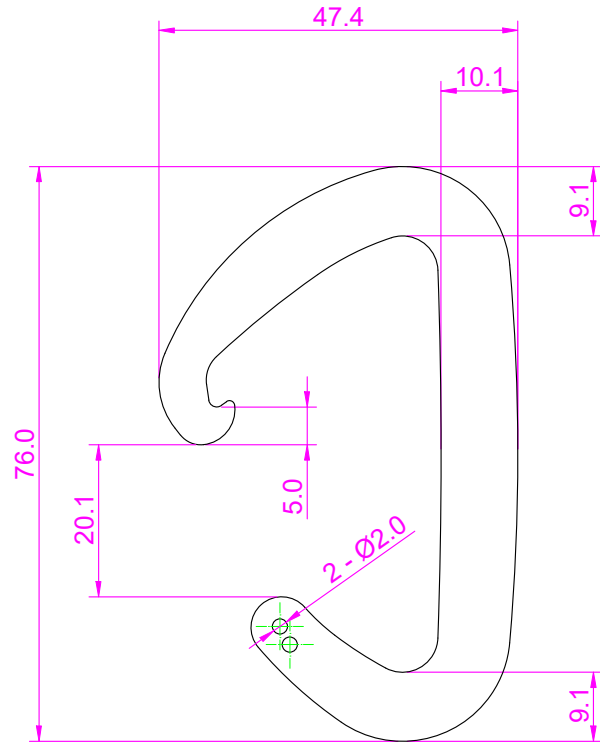

ASSEMBLY VIEW
SCALE 1:2

SPRING

3D DRAWING



NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50

INFORMATION

ITEM NO.	H129L
DESCRIPTION	RANGER CARABINER
MATERIAL	ALU6061 - T6, T = 4MM
WEIGHT	14.30g
DATE	05/SEP/2025