



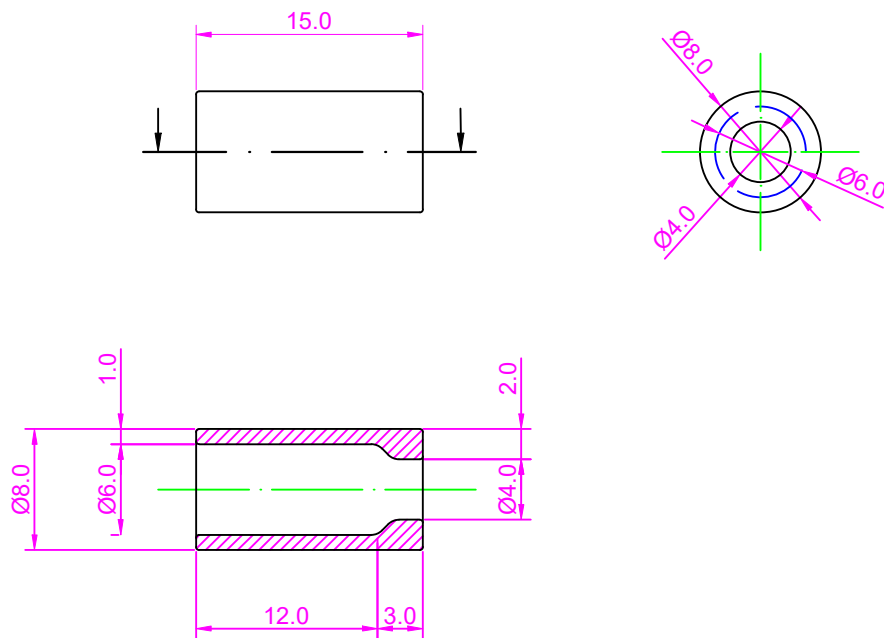


3D DRAWING

Z111 - 15 - OUTSIDE



Z111 - 15 - INSIDE



NOTES




1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50


INFORMATION

ITEM NO.	Z111 - 15
DESCRIPTION	DOUBLE STEP AL-PUL
MATERIAL	ALU6063 - T5, T = 2MM & 1MM
WEIGHT	1.00g
DATE	18/JUN/2025

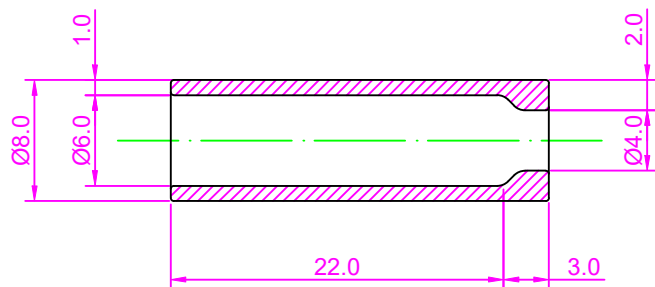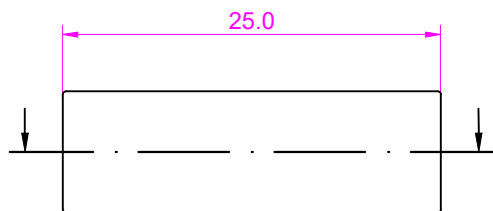


3D DRAWING

Z111 - 25 - OUTSIDE



Z111 - 25 - INSIDE



NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50

INFORMATION

ITEM NO.	Z111 - 25
DESCRIPTION	DOUBLE STEP AL-PUL
MATERIAL	ALU6063 - T5, T = 2MM & 1MM
WEIGHT	1.20g
DATE	02/MAR/2025