

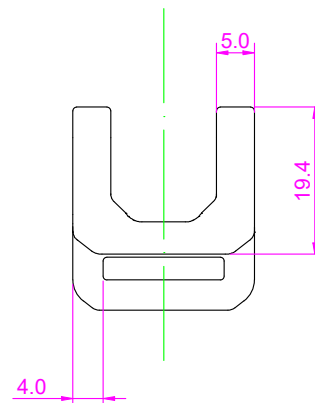




3D DRAWING

FRONT SIDE

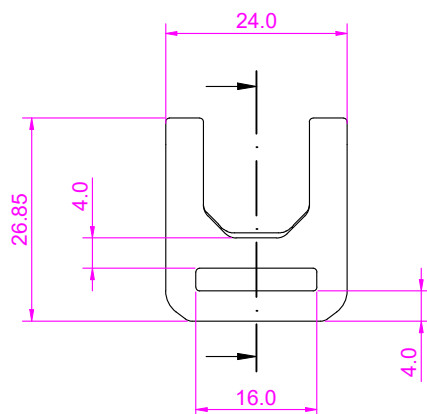

BACK SIDE



NOTES




1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50

INFORMATION

ITEM NO.	H171 - 15
DESCRIPTION	NEO FLAT SINGLE HOOK
MATERIAL	ALU5052, T = 2.0MM
WEIGHT	3.40g
DATE	11/FEB/2026

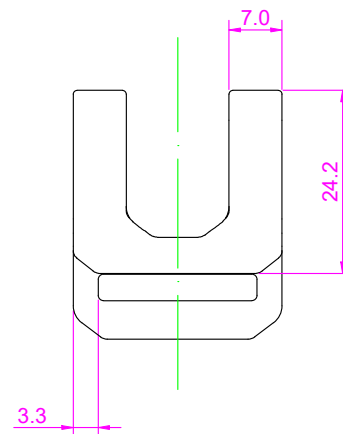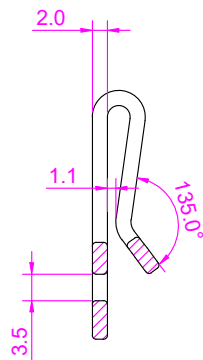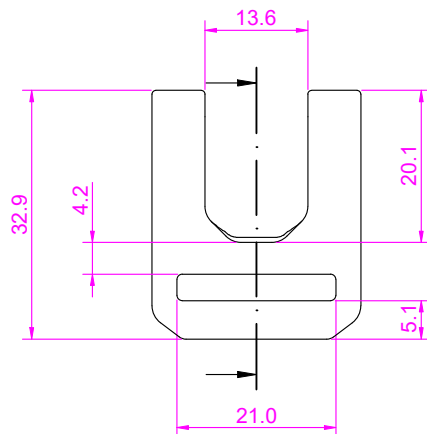


3D DRAWING

FRONT SIDE



BACK SIDE



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50


INFORMATION

ITEM NO.	H171 - 20
DESCRIPTION	NEO FLAT SINGLE HOOK
MATERIAL	ALU5052, T = 2.0MM
WEIGHT	5.30g
DATE	25/DEC/2025

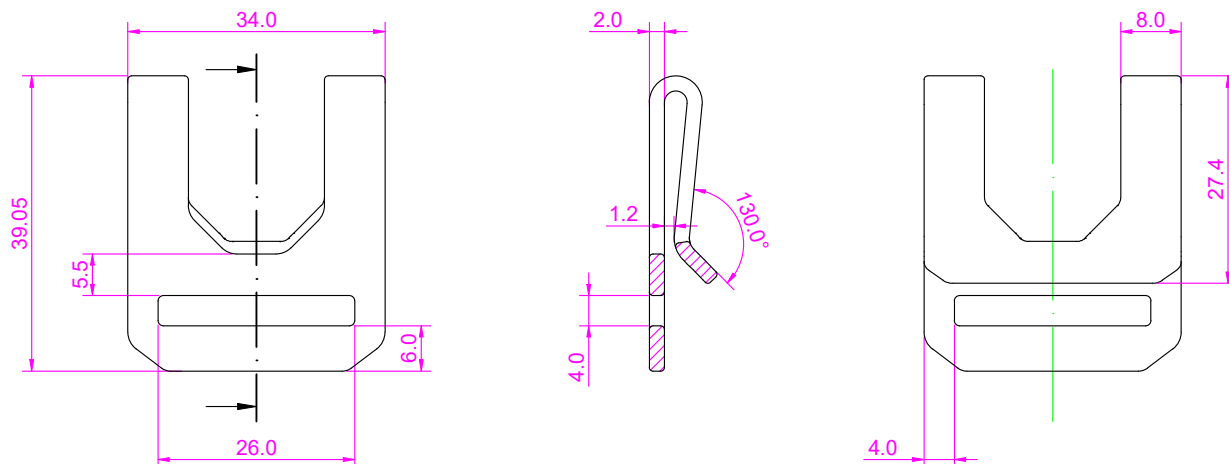


3D DRAWING

FRONT SIDE



BACK SIDE



NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50

INFORMATION

ITEM NO.	H171 - 25
DESCRIPTION	NEO FLAT SINGLE HOOK
MATERIAL	ALU5052, T = 2.0MM
WEIGHT	7.50g
DATE	11/FEB/2026