WETOOL
PRECISION IS OUR QUALITY

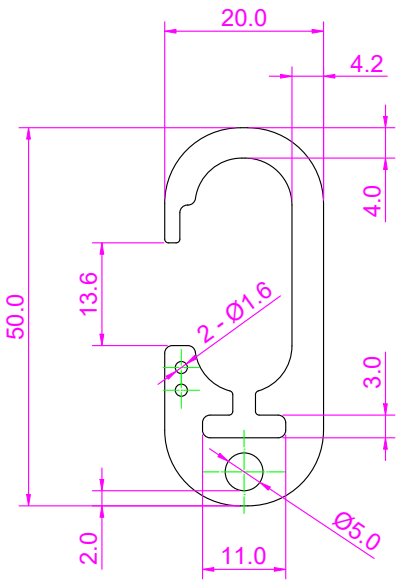

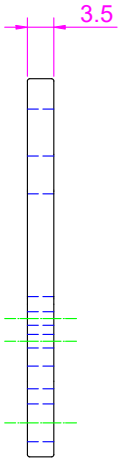

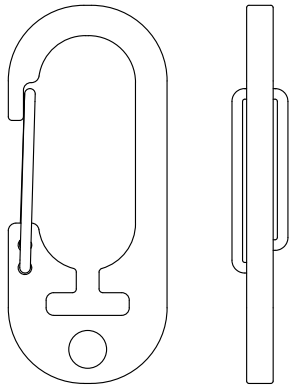

ASSEMBLY VIEW

SCALE 1:1

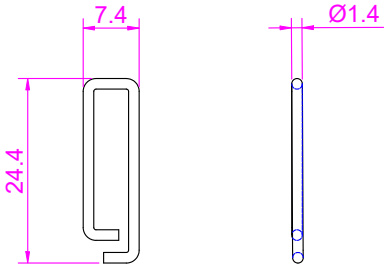

SPRING

3D DRAWING

NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0 ~ 10	+/- 0.20
11 ~ 25	+/- 0.25
26 ~ 38	+/- 0.30
39 ~ 50	+/- 0.40
OVER 50	+/- 0.50

INFORMATION

ITEM NO.	H145 - 10
DESCRIPTION	NEO BELT CARABINER
MATERIAL	ALU6061 - T6, T = 3.5MM
WEIGHT	4.60g
DATE	08/AUG/2024

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WETOOL, AND MAY NOT BE REPRODUCED, OR COPIED IN ANY WAY WITHOUT PRIOR WRITTEN CONSENT OF WETOOL

WETOOL
PRECISION IS OUR QUALITY

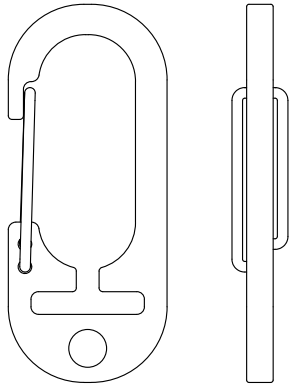

ASSEMBLY VIEW

SCALE 1:1

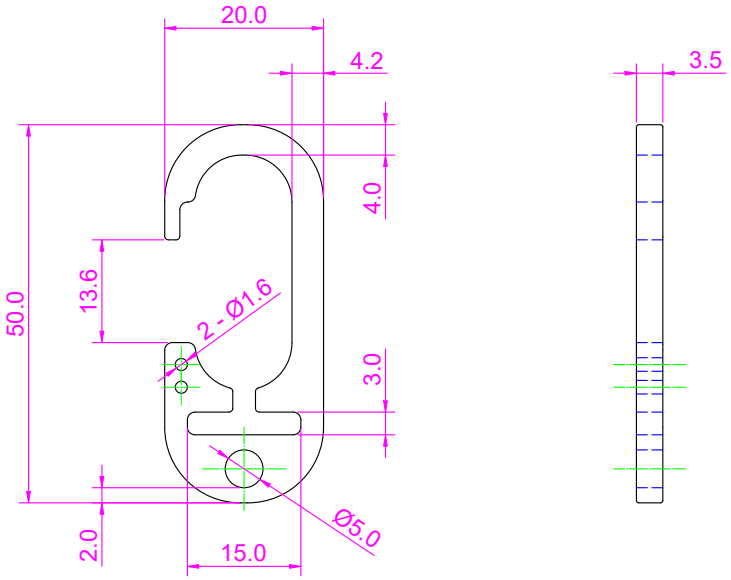

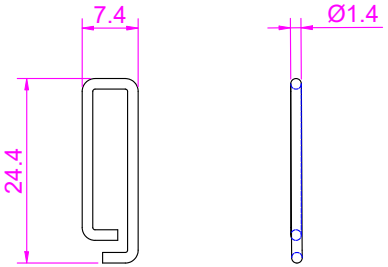

SPRING

3D DRAWING



NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0 ~ 10	+/- 0.20
11 ~ 25	+/- 0.25
26 ~ 38	+/- 0.30
39 ~ 50	+/- 0.40
OVER 50	+/- 0.50

INFORMATION

ITEM NO.	H145 - 15
DESCRIPTION	NEO BELT CARABINER
MATERIAL	ALU6061 - T6, T = 3.5MM
WEIGHT	4.60g
DATE	23/MAY/2024

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WETOOL, AND MAY NOT BE REPRODUCED, OR COPIED IN ANY WAY WITHOUT PRIOR WRITTEN CONSENT OF WETOOL