




3D DRAWING

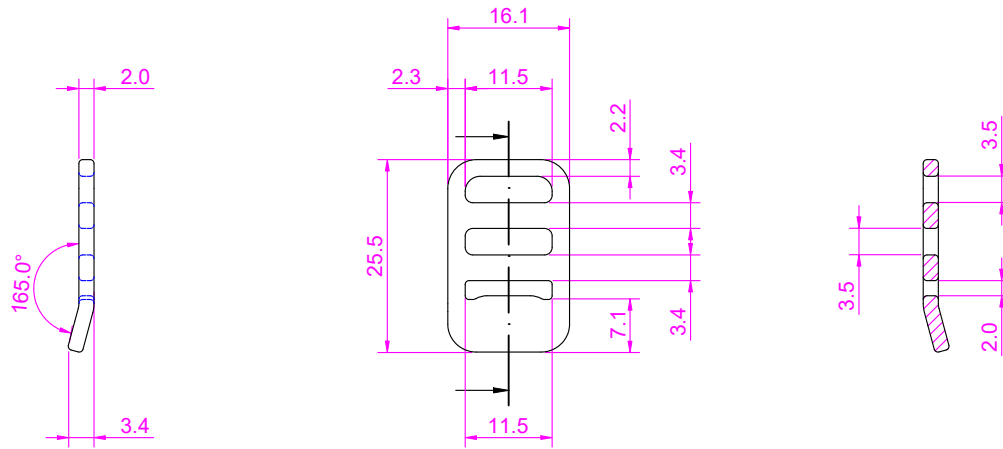

NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION

ITEM NO.	K107 - 10
DESCRIPTION	MINI TENSION LOCK
MATERIAL	ALU6061 - T6, T = 2.0MM
WEIGHT	1.50g
DATE	22/SEP/2026

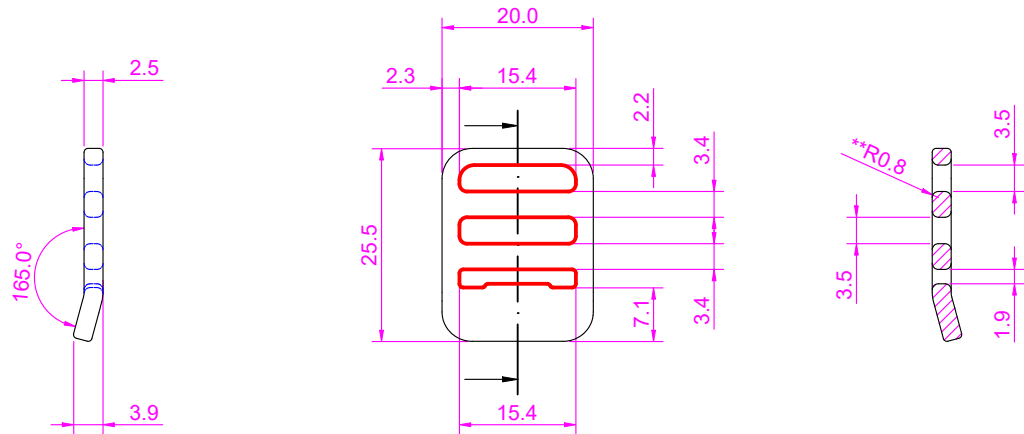

 **FILLET TREATMENT
TO AVOID SHARP EDGES**

3D DRAWING



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.
6. RED LINE WILL BE APPLIED FILLET TREATMENT.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION

ITEM NO.	K107 - 15
DESCRIPTION	MINI TENSION LOCK
MATERIAL	ALU6061 - T6, T = 2.5MM
WEIGHT	2.30g
DATE	22/SEP/2026

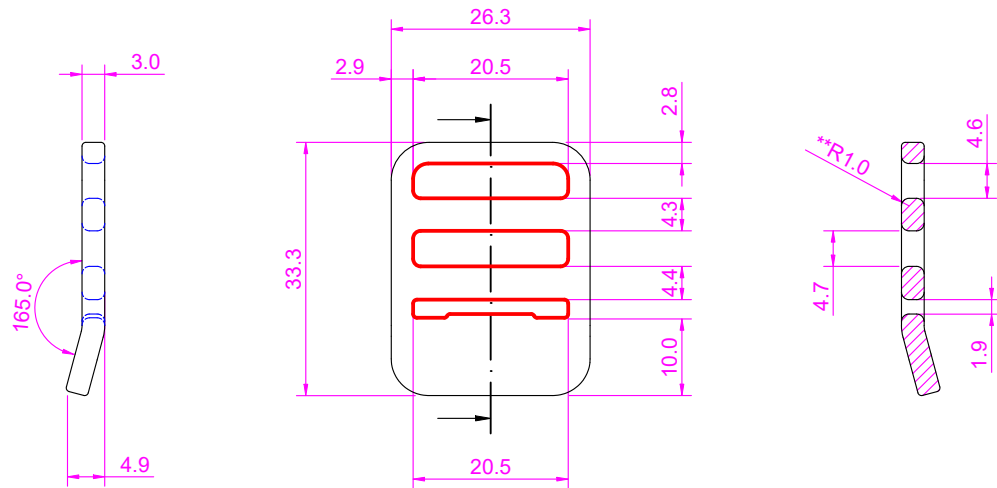

 **FILLET TREATMENT
TO AVOID SHARP EDGES**

3D DRAWING



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.
6. RED LINE WILL BE APPLIED FILLET TREATMENT.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50


INFORMATION

ITEM NO.	K107 - 20
DESCRIPTION	MINI TENSION LOCK
MATERIAL	ALU6061 - T6, T = 3.0MM
WEIGHT	4.00g
DATE	22/SEP/2026

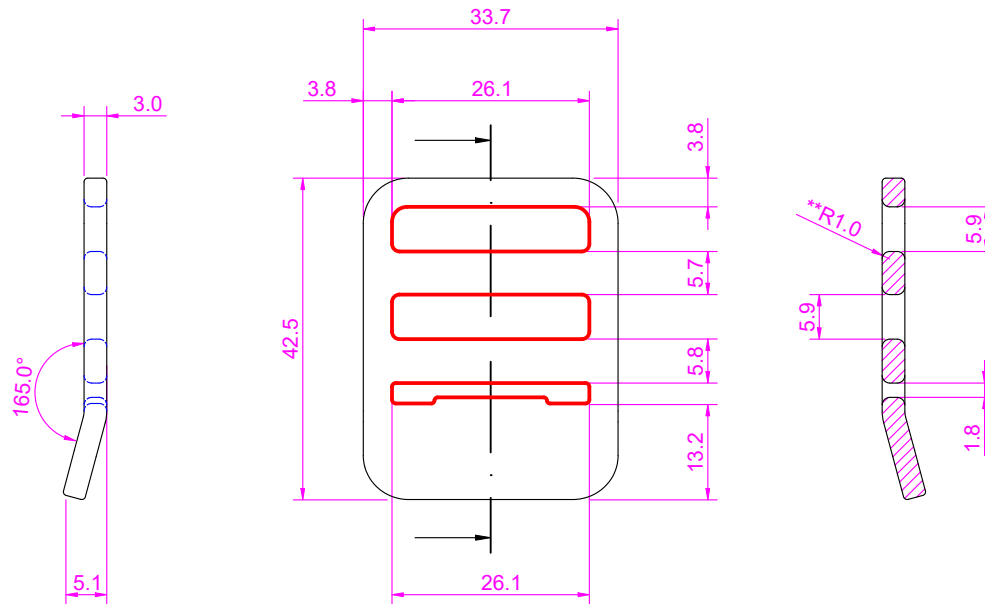

 **FILLET TREATMENT
TO AVOID SHARP EDGES**

3D DRAWING



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.
6. RED LINE WILL BE APPLIED FILLET TREATMENT.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION

ITEM NO.	K107 - 25
DESCRIPTION	MINI TENSION LOCK
MATERIAL	ALU6061 - T6, T = 3.0MM
WEIGHT	4.00g
DATE	22/SEP/2026

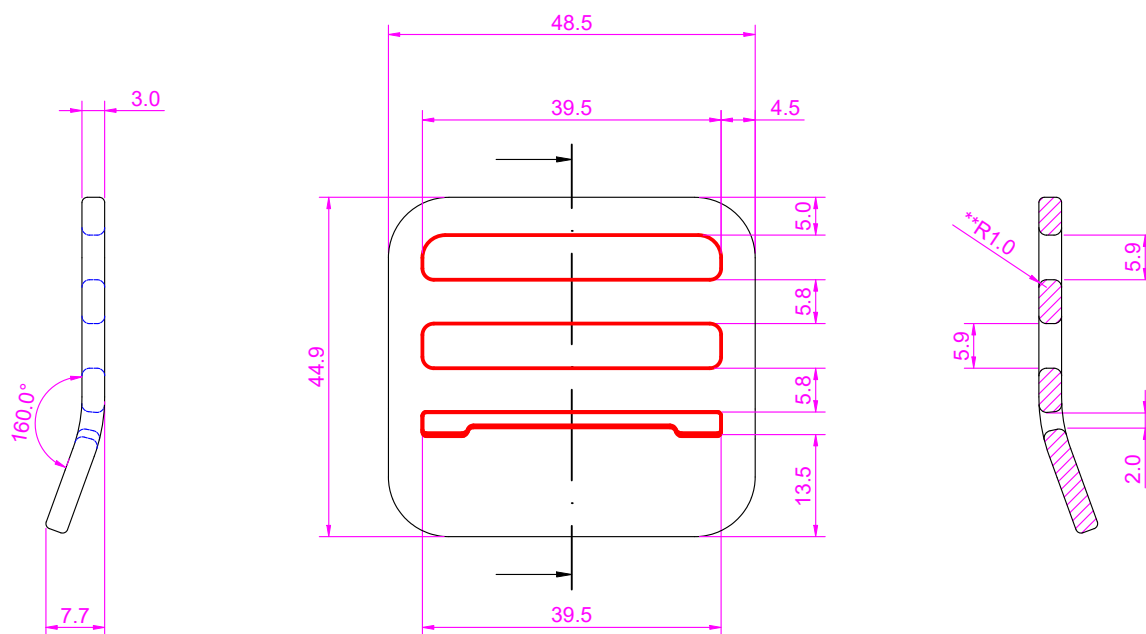

 **FILLET TREATMENT
TO AVOID SHARP EDGES**

3D DRAWING



NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.
6. RED LINE WILL BE APPLIED FILLET TREATMENT.

GENERAL TOLERANCES (mm)

0	~ 10	+/- 0.20
11	~ 25	+/- 0.25
26	~ 38	+/- 0.30
39	~ 50	+/- 0.40
OVER 50		+/- 0.50

INFORMATION

ITEM NO.	K107 - 38
DESCRIPTION	MINI TENSION LOCK
MATERIAL	ALU6061 - T6, T = 3.0MM
WEIGHT	14.70g
DATE	12/JAN/2026