

3D DRAWING



NOTES




1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION

ITEM NO.	H144 - 1015
DESCRIPTION	HYBRID SINGLE HOOK
MATERIAL	ALU6061 - T6, T = 3MM
WEIGHT	2.30g
DATE	03/JUN/2025

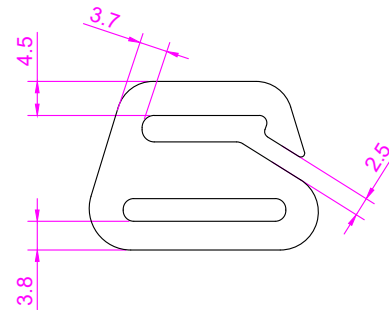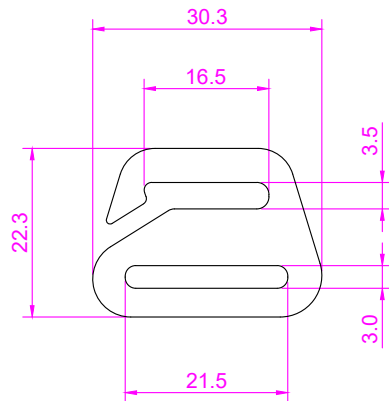

3D DRAWING



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION

ITEM NO.	H144 - 1520
DESCRIPTION	HYBRID SINGLE HOOK
MATERIAL	ALU6061 - T6, T = 3MM
WEIGHT	3.50g
DATE	03/JUN/2025

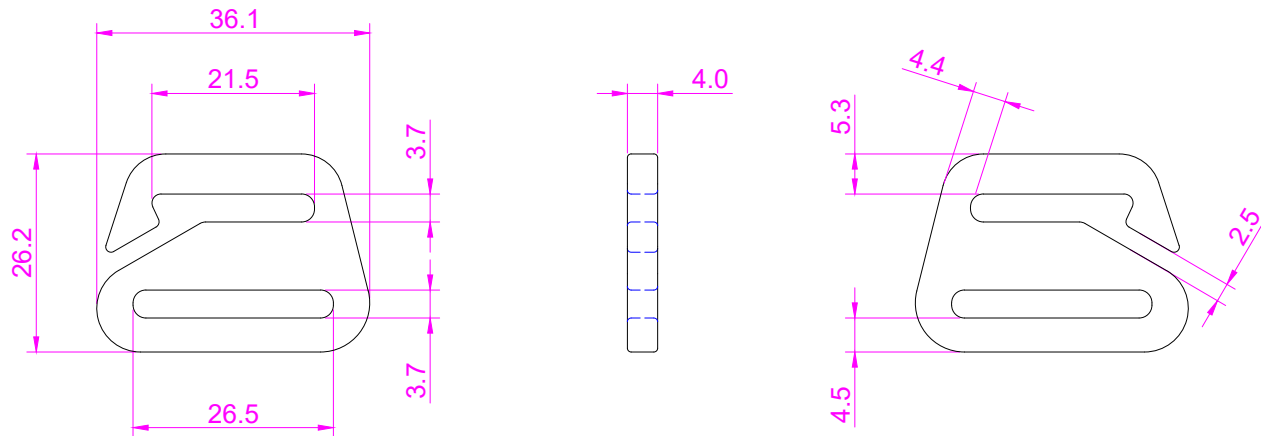

3D DRAWING



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION

ITEM NO.	H144 - 2025
DESCRIPTION	HYBRID SINGLE HOOK
MATERIAL	ALU6061 - T6, T = 4MM
WEIGHT	6.70g
DATE	03/JUN/2025

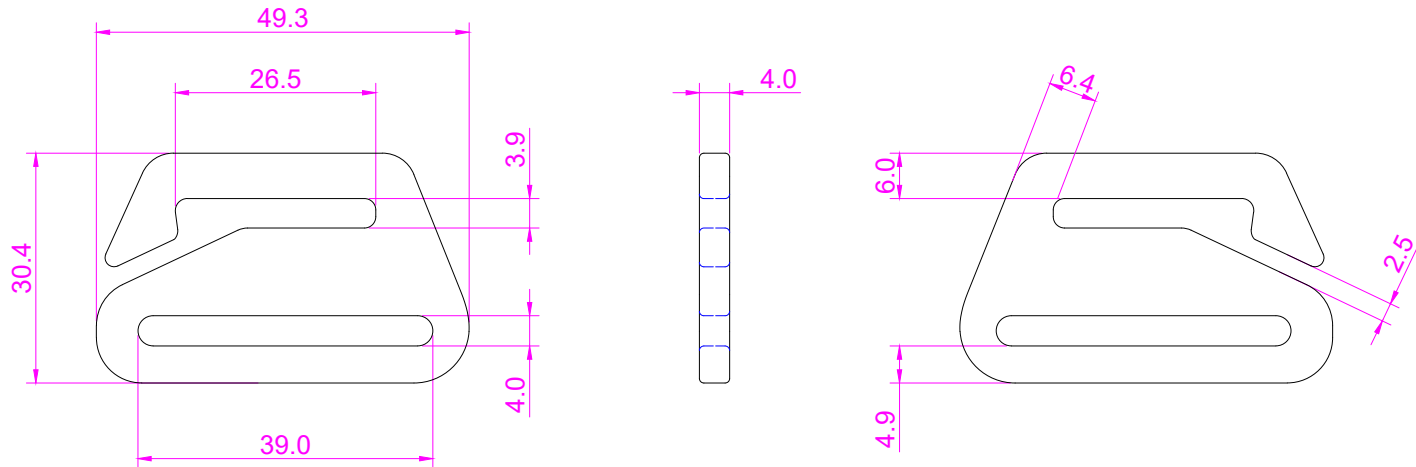

3D DRAWING



NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION

ITEM NO.	H144 - 2538
DESCRIPTION	HYBRID SINGLE HOOK
MATERIAL	ALU6061 - T6, T = 4MM
WEIGHT	10.60g
DATE	03/JUN/2025