

3D DRAWING

H132 - 25R



H125 - 25L



NOTES


1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

| | | |
|---------|------|----------|
| 0 | ~ 10 | +/- 0.20 |
| 11 | ~ 25 | +/- 0.25 |
| 26 | ~ 38 | +/- 0.30 |
| 39 | ~ 50 | +/- 0.40 |
| OVER 50 | | +/- 0.50 |

INFORMATION

| | |
|-------------|-----------------------|
| ITEM NO. | H132 - 25 |
| DESCRIPTION | MILITARY G-HOOK |
| MATERIAL | ALU6061 - T6, T = 3MM |
| WEIGHT | 6.10g |
| DATE | 03/AUG/2024 |

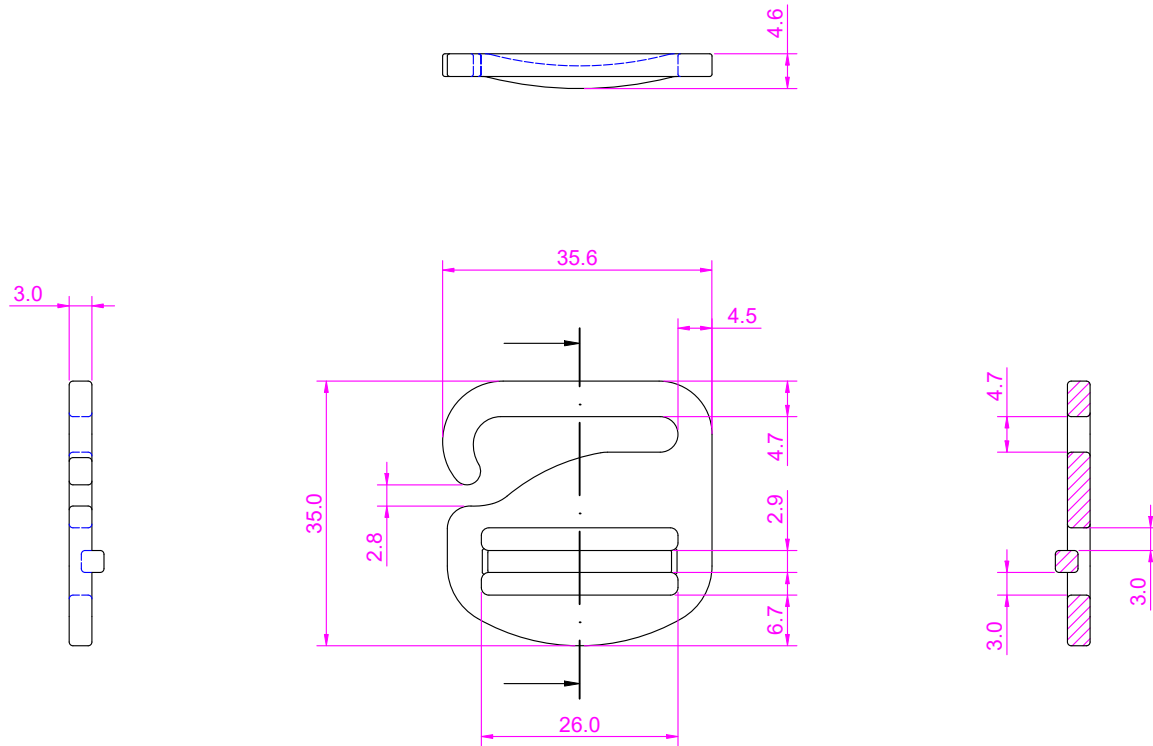

3D DRAWING

H132 - 25RSTL



H125 - 25LSTL



NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

| | | |
|---------|------|----------|
| 0 | ~ 10 | +/- 0.20 |
| 11 | ~ 25 | +/- 0.25 |
| 26 | ~ 38 | +/- 0.30 |
| 39 | ~ 50 | +/- 0.40 |
| OVER 50 | | +/- 0.50 |

INFORMATION

| | |
|-------------|----------------------|
| ITEM NO. | H132 - 25 |
| DESCRIPTION | MILITARY G-HOOK |
| MATERIAL | STEEL SS400, T = 3MM |
| WEIGHT | 11.50g |
| DATE | 03/AUG/2024 |