
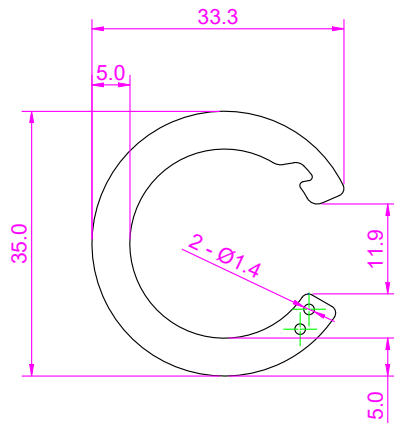


ASSEMBLY VIEW
SCALE 1:1

SPRING

3D DRAWING



NOTES





1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION

ITEM NO.	H148 - 25
DESCRIPTION	FLAT O CARABINER
MATERIAL	ALU6061 - T6, T = 3.5MM
WEIGHT	3.80g
DATE	23/MAY/2024

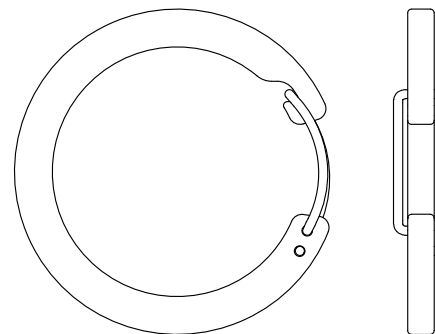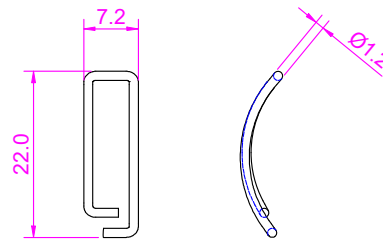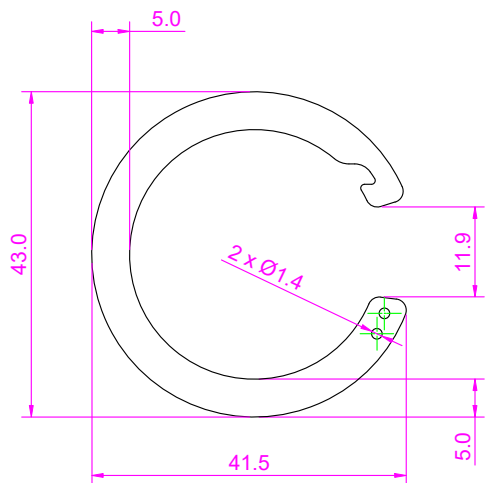

ASSEMBLY VIEW

SCALE 1:1

SPRING

3D DRAWING



NOTES

1. BURR OF BRACKET SHOULD BE MINIMIZED.
2. BRACKET SHOULD BE FREE OF SHARP EDGES.
3. UNSPECIFIED RADIUS WOULD BE 0.5MM.
4. IMPORTANT PARTS ARE MARKED BY ASTERISK.
5. SAMPLE APPROVAL IS REQUIRED.

GENERAL TOLERANCES (mm)

0	~	10	+/- 0.20
11	~	25	+/- 0.25
26	~	38	+/- 0.30
39	~	50	+/- 0.40
OVER 50			+/- 0.50

INFORMATION

ITEM NO.	H148 - 32
DESCRIPTION	FLAT O CARABINER
MATERIAL	ALU6061 - T6, T = 3.5MM
WEIGHT	4.90g
DATE	11/JUL/2026